

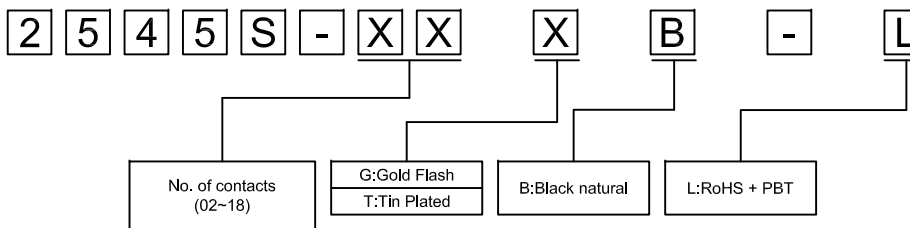


- * Poles:2-18
 - * Material:Insulator:PBT UL94V-0 BLACK
 - * Contact:0.64mm(.025") square pin,brass,gold plated
 - * Mates with 2545 series housing
- Specifications**
- * Current rating: 2.5A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 600 AC/minute
 - * Applicable PC board thickness: .063" (1.6mm)



ORDER INFORMATION

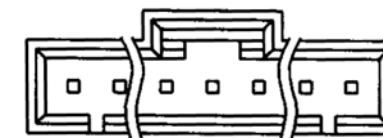


PIN	Dimensions	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26

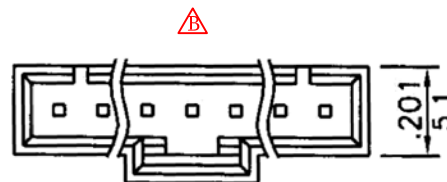


(4~18P)

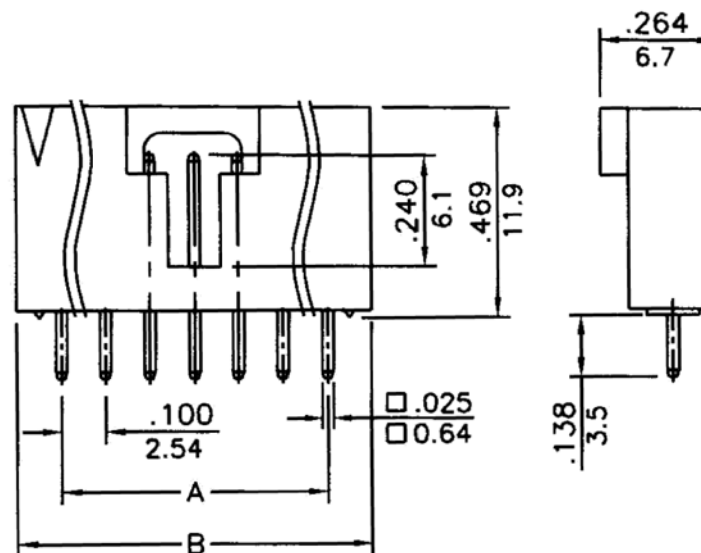

(3P)



(2P)



P.C. Board Layout

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL:886-2-2260-8878 FAX:886-2-2260-8030	品名 TITLE	2.54mm Mini Latch WAFER STRAIGHT				
	品號 PART NO.	2545S-XX-L			日期 DATE	2009/09/18
	圖號 DRAWING NO.	2545S-XX-L	版本 REV.	B	繪圖 DRAWN	Sam
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Sharron
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	James

△	B	Revise the drawing	2015/11/27
AREA	REV.	DESCRIPTION	DATE