

SPECIFICATION

Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy




ORDER INFORMATION

5 B H 3 M S C 4 9 - X X X X X X U - 0 0

No. of contacts 08, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 68	G0:Gold Flash	S0:Selective Au	5:W/O peg & W/O ejector	C:Tube With Cap T:Tube W/O Cap R:T/R With Cap	RoHS
	GA:5u"	SA:5u"			
	GB:10u"	SB:10u"			
	GC:20u"	SC:20u"			
	GD:30u"	SD:30u"	6:With peg & W/O ejector		
	T0:Tin Plated				
	TE:Tin 200u"				

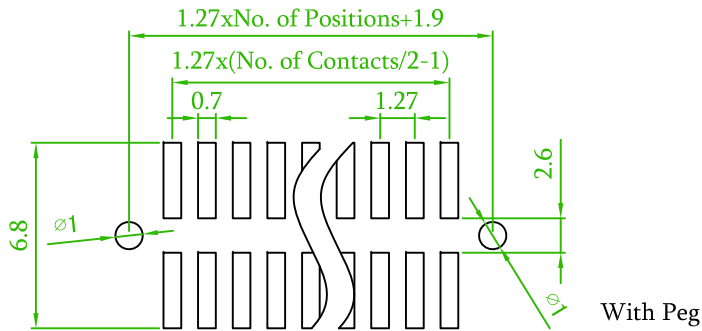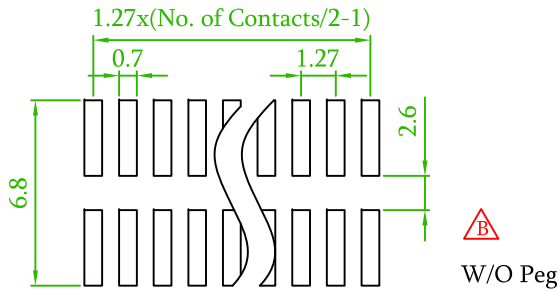

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

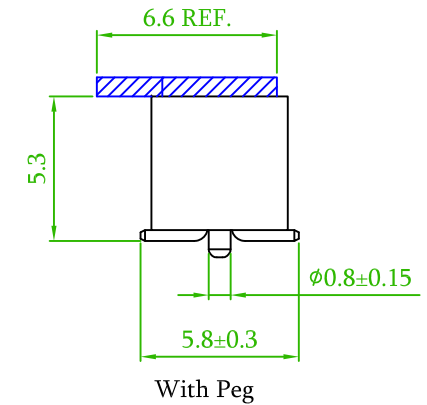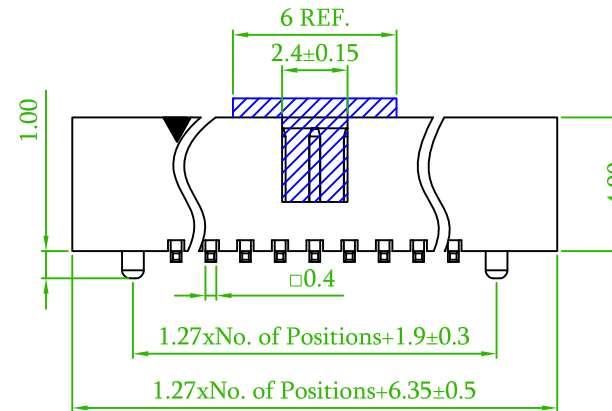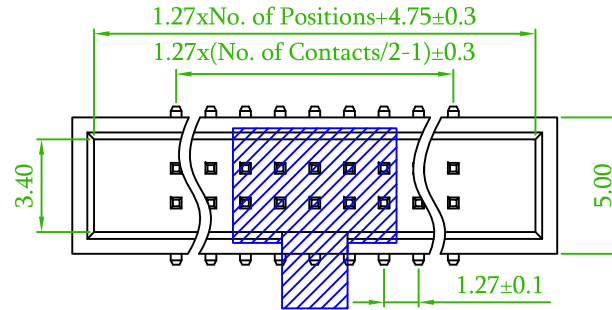

△	Add .: R: T/R With Cap	David	2019/07/19
△x3	Add an option: 5: W/O Peg & W/O ejector, add drawings of W/O Peg.	Gary	2017/12/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	1.27mm BOX HEADER D/R V/T SMT TYPE			頁數 Page	1/1
品號 PART NO.	5BH3MSC49-XXXXXXU-00			繪圖 DRAWN	Gary 2017/07/04
圖號 DRAWING NO.	GN110-GA459	版本 REV.	C	核對 CHECKED	Josh 2017/12/25
客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2017/12/25
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	⊕ ↯