





SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0


ORDER INFORMATION

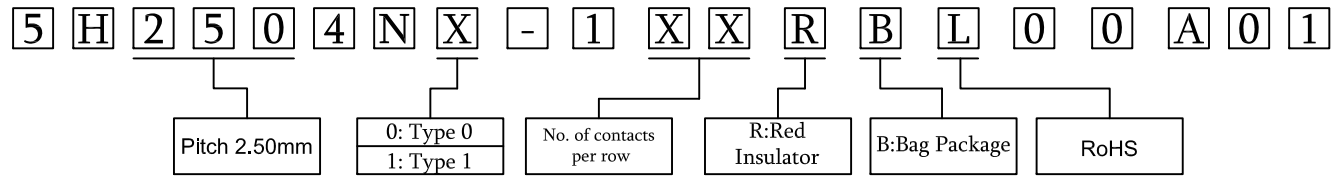

No. of contacts	Dimensions	
	A	B
1x02	2.50	5.50
1x03	5.00	8.00
1x04	7.50	10.50
1x05	10.00	13.00
1x06	12.50	15.50
1x07	15.00	18.00
1x08	17.50	20.50
1x09	20.00	23.00
1x10	22.50	25.50
1x11	25.00	28.00
1x12	27.50	30.50
1x13	30.00	33.00
1x14	32.50	35.50
1x15	35.00	38.00

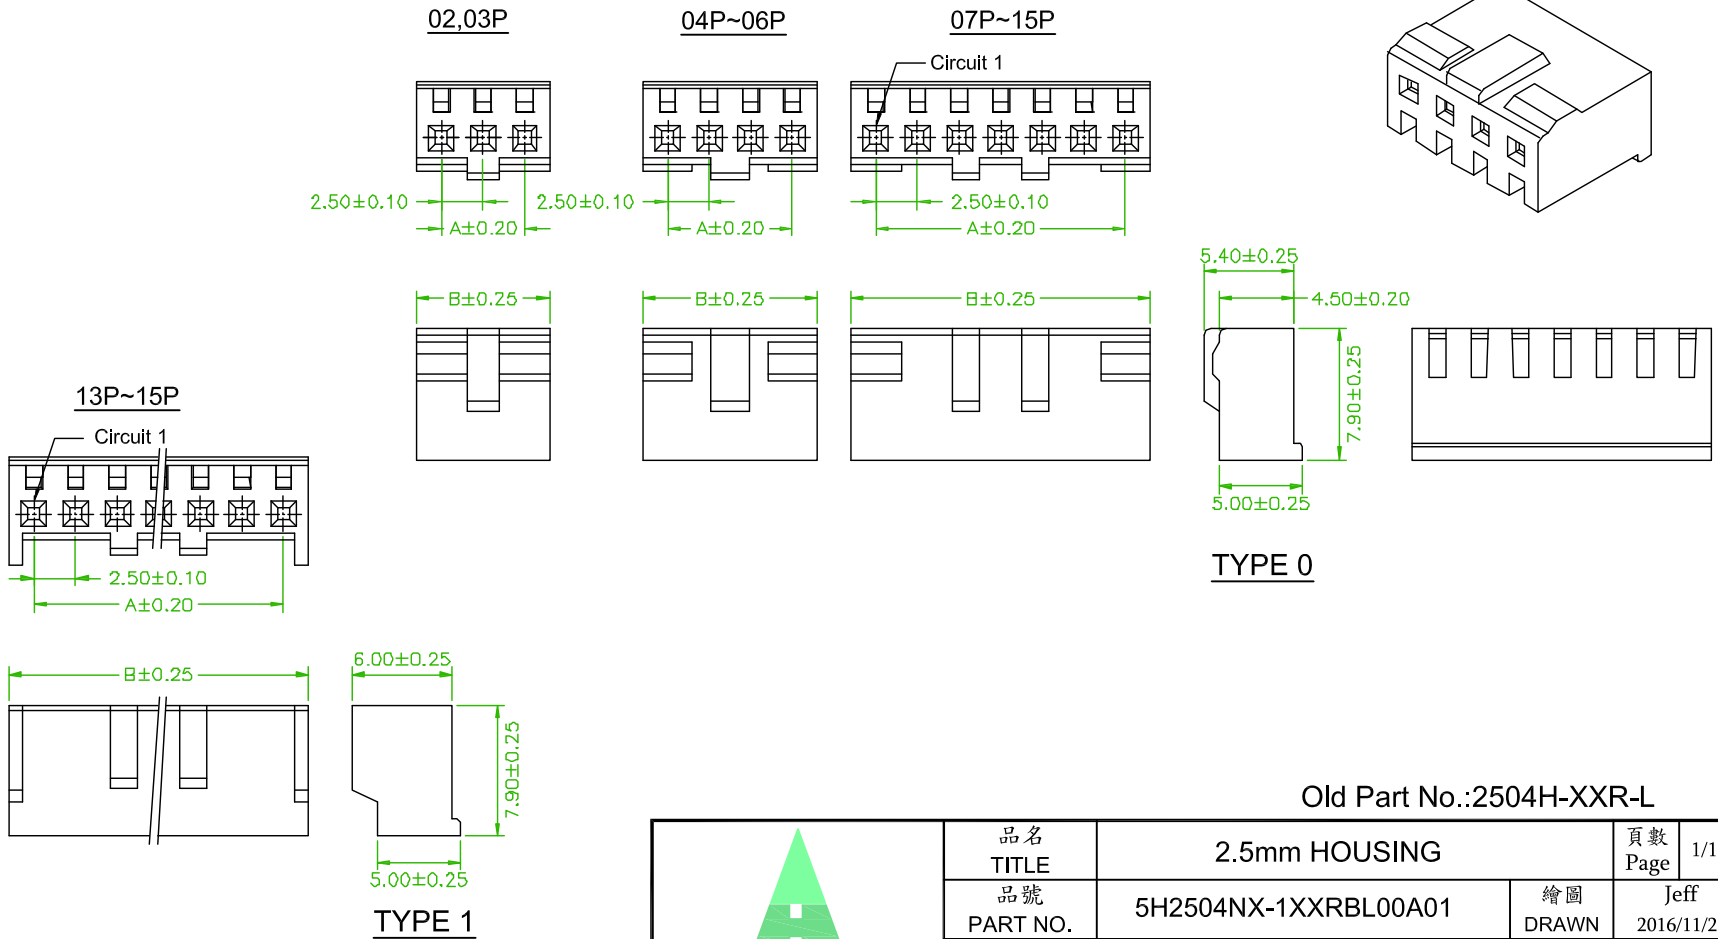

Old Part No.: 2504H-XXR-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2504NX-1XXRBL00A01			繪圖 DRAWN	Jeff 2016/11/21
	圖號 DRAWING NO.	GW090-JF037	版本 REV.	A	核對 CHECKED	Jonny 2016/11/21
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/21
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE