


SPECIFICATIONS


Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Dielectric Voltage: 800V AC for one minute
 Operation Temperature: -25°C to +85°C

MATERIAL


Material: Noryl, UL94V-1 

ORDER INFORMATION


5 H 2 5 4 1 N X - 1 X X B B L 0 0 D 0 1

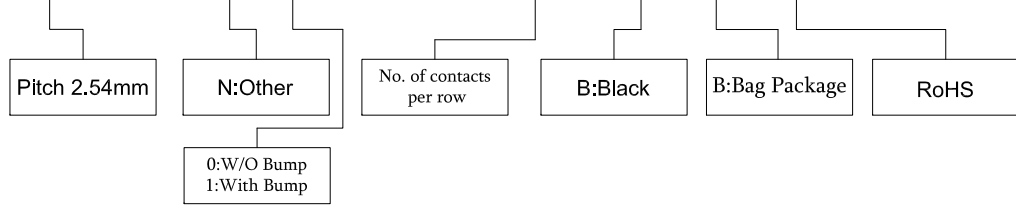


CIRCUITS	DIM. A	DIM. B
1		2.65
2	2.54	5.28
3	5.08	7.82
4	7.62	10.36
5	10.16	12.90
6	12.70	15.44
7	15.24	17.98
8	17.78	20.52
9	20.32	23.06
10	22.86	25.60
11	25.40	28.14
12	27.94	30.68
13	30.48	33.22
14	33.02	35.76
15	35.56	38.30
16	38.10	40.84
17	40.64	43.38
18	43.18	45.92
19	45.72	48.46
20	48.26	51.00
21	50.80	53.54
22	53.34	56.08
23	55.88	58.62
24	58.42	61.16
25	60.96	63.70
26	63.50	66.24
27	66.04	68.78
28	68.58	71.32
29	71.12	73.86
30	73.66	76.40
31	76.20	78.94
32	78.74	81.48
33	81.28	84.02
34	83.82	86.56
35	86.36	89.10
36	88.90	91.64
37	91.44	94.18
38	93.98	96.72
39	96.52	99.26
40	99.06	101.80

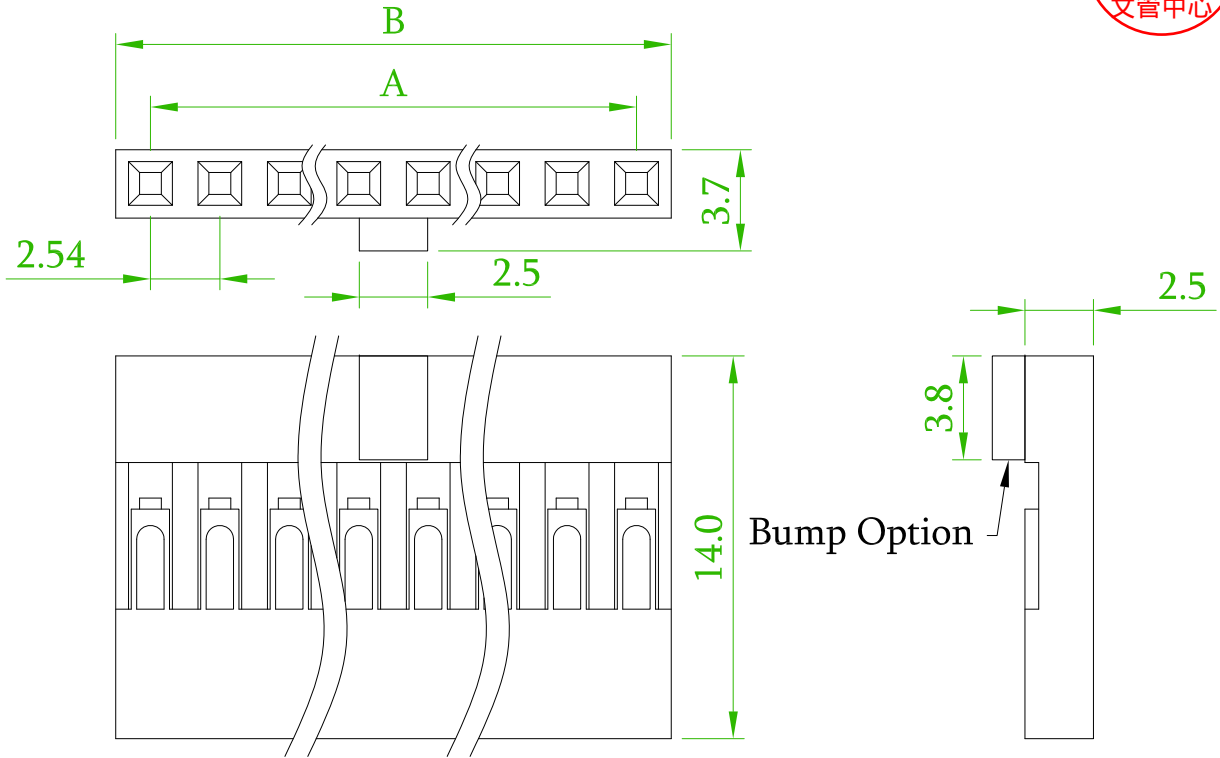

Old Part No.:2541H-1XXBX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECN NO.: 171120, revise the material: Noryl V-1, UL94V-0 -> Noryl, UL94V-1.	Gary	2017/11/23

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2541NX-1XXBBL00D01			繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GW097-GA795	版本 REV.	B	核對 CHECKED	Yvonne
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	