

**SPECIFICATIONS**


Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/minute  
 Temperature Range: -25°C ~ +85°C

**Material**



Material:Noryl,UL94V-1  
 Color: Black

**ORDER INFORMATION**

5 H 2 5 4 1 N X - 2 X X B B L 0 0 D 0 1

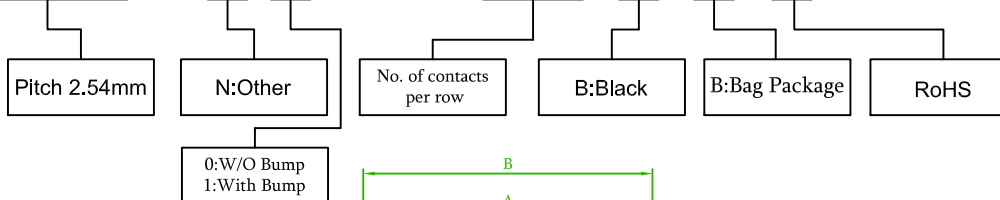


No. of contacts per	Dimensions		No. of contacts per	Dimensions	
	A	B		A	B
02	2.54	5.08	26	63.50	66.04
03	5.08	7.62	27	66.04	68.58
04	7.62	10.16	28	68.58	71.12
05	10.16	12.70	29	71.12	73.66
06	12.70	15.24	30	73.66	76.20
07	15.24	17.78	31	76.20	78.74
08	17.78	20.32	32	78.74	81.28
09	20.32	22.86	33	81.28	83.82
10	22.86	25.40	34	83.82	86.36
11	25.40	27.94	35	86.36	88.90
12	27.94	30.48	36	88.90	91.44
13	30.48	33.02	37	91.44	93.98
14	33.02	35.56	38	93.98	96.52
15	35.56	38.10	39	96.52	99.06
16	38.10	40.64	40	99.06	101.60
17	40.64	43.18			
18	43.18	45.72			
19	45.72	48.26			
20	48.26	50.80			
21	50.80	53.34			
22	53.34	55.88			
23	55.88	58.42			
24	58.42	60.96			
25	60.96	63.50			

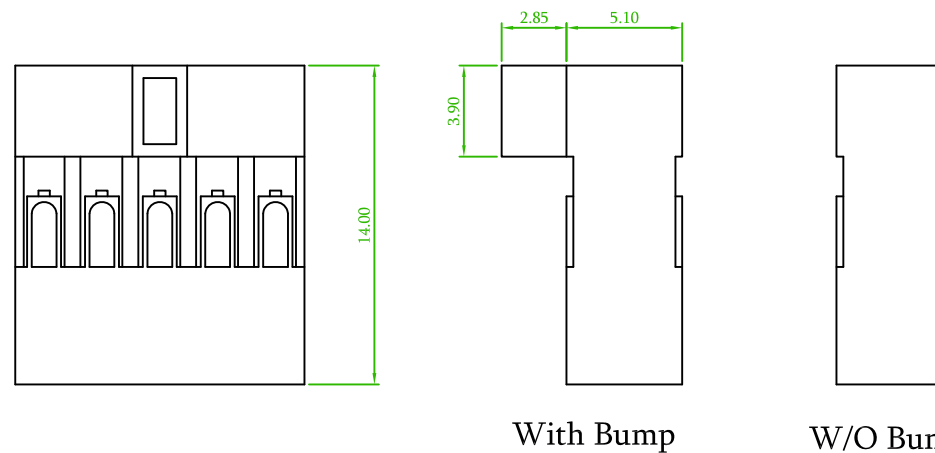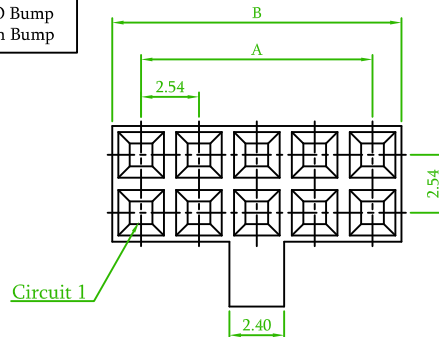

Old Part No.:2541H-2XXBX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2541NX-2XXBBL00D01			繪圖 DRAWN	Roy 2016/08/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris 2016/08/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/16
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION