






**Specifications**

Current Rate:1 AMP  
 Insulation Resistance:10000M ΩMin.  
 Contact Resistance:20m ΩMax.  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

**Material**

Insulator:Polyester,UL 94V-0  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

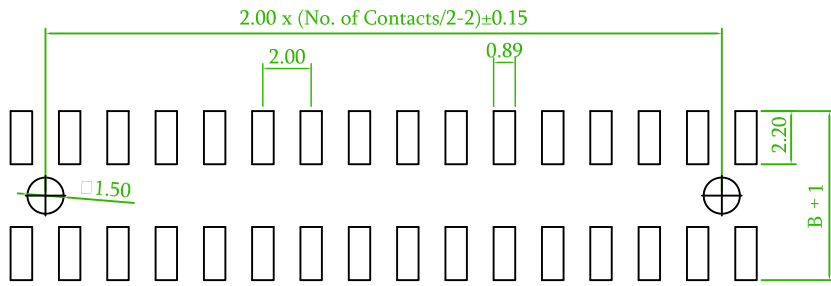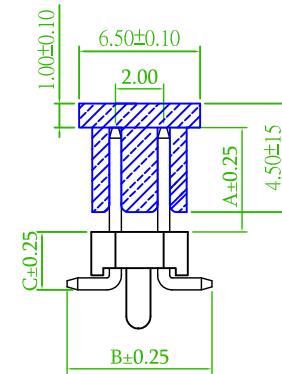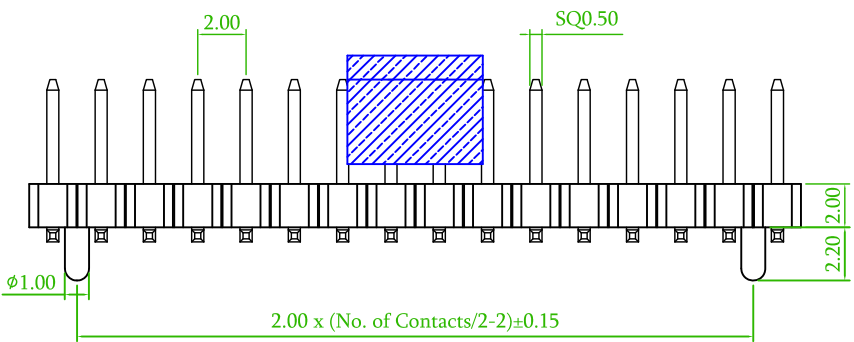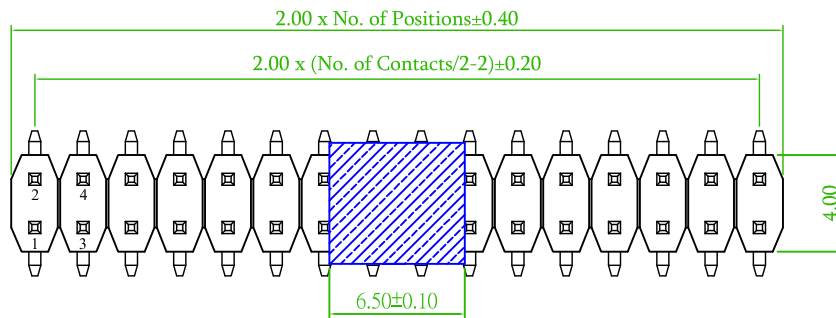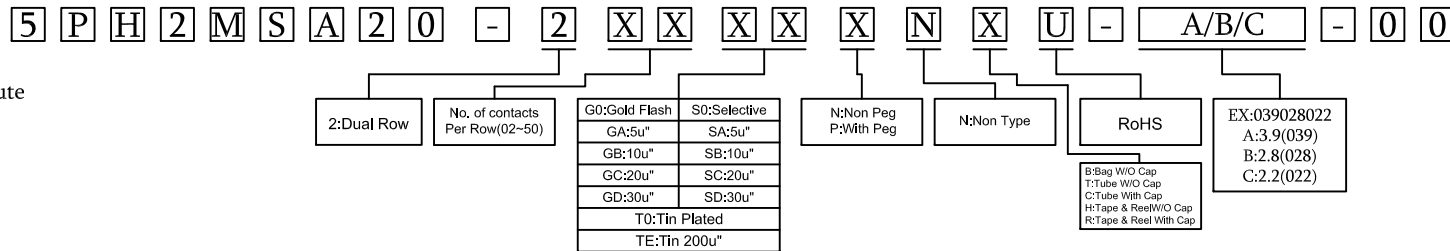

**P.C.B LAYOUT**

Old Part No. :PH2M20-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 2.0mm SMT STRAIGHT			頁數 Page	1/1
品號 PART NO.	5PH2MSA20-2XXXXXXNXU -XXXXXXXXXX-00		繪圖 DRAWN	Athena 2015/08/18	
圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	