


**ELECTRICAL**

Standard: UL IEC  
 Rated Voltage: 300V 250V  
 Rated Current: 8A 8A  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 500MΩ/DC500V  
 Withstanding Voltage: AC 2000V for one minute

**ORDER INFORMATION**

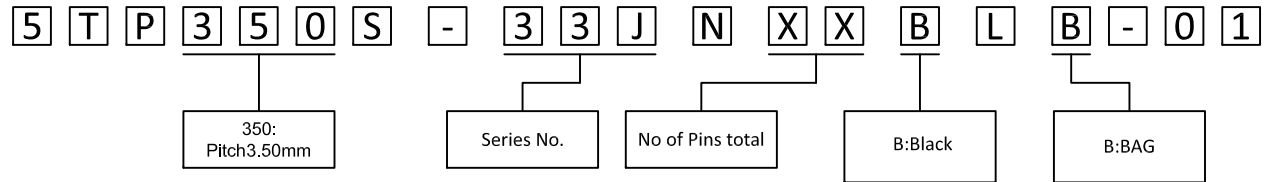

**MECHANICAL**



Temp. Range: -40°C ~ +105°C

**MATERIAL**

Housing: PBT, UL94V-0  
 Pin Header: Copper Alloy, Sn Plated

**DIMENSIONS**

Pitch: 3.5mm  
 Poles: 2P-24P

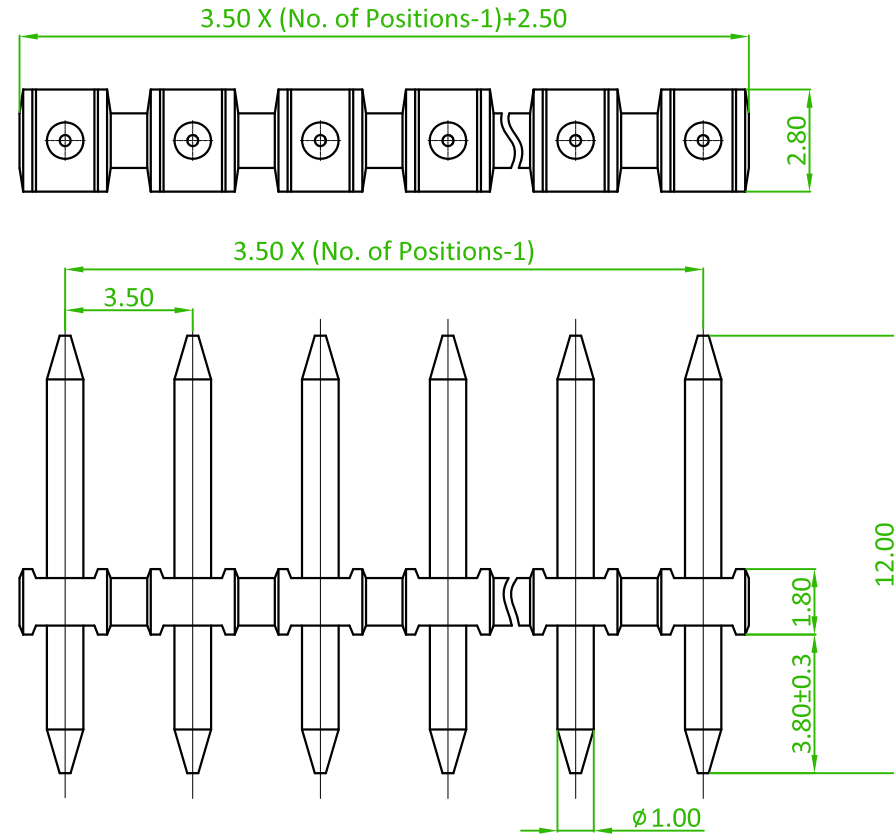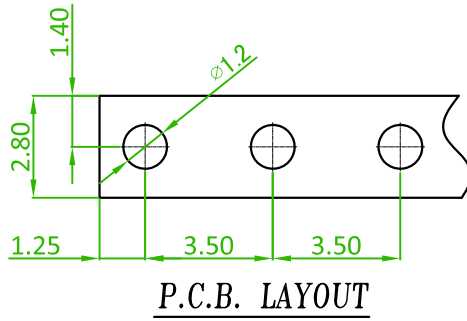

linear dimension (Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥	
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

**Amtek Technology Co., Ltd.**  
 糧德精密有限公司  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP350S-33JNXBLB-01				繪圖 DRAWN	Mia 2017/02/14
圖號 DRAWING NO.	GN116-MC279	版本 REV.	A	核對 CHECKED	Jonny 2017/02/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/02/14	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		