


### SPECIFICATIONS

Current Rating: 5A AC, DC  
 Voltage Rating: 250V AC, DC  
 Contact Resistance: 10mΩ Max.  
 After environmental testing: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Insulation resistance: 1000mΩ Min.  
 Operation Temperature: -25°C to +80°C

### MATERIAL

Contact Pin: Brass  
 Insulator: LCP, UL94V-0



No. of Contacts	Dimensions(mm)	
	A	B
2x1	6.65	---
2x2	9.65	3.00
2x3	12.65	6.00
2x4	15.65	9.00
2x5	18.65	12.00
2x6	21.65	15.00
2x7	24.65	18.00
2x8	27.65	21.00
2x9	30.65	24.00
2x10	33.65	27.00
2x11	36.65	30.00
2x12	39.65	33.00

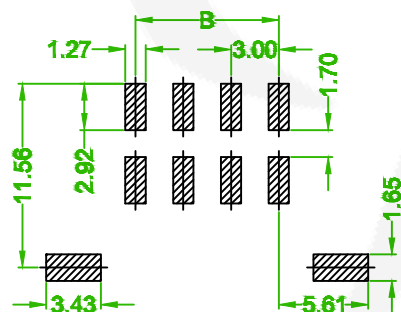

Recommended P.C.B Layout  
 General Tolerance±0.05

### ORDER INFORMATION

5 W 3 0 0 0 H 0 - 2 X X T 0 X H U K 0 1

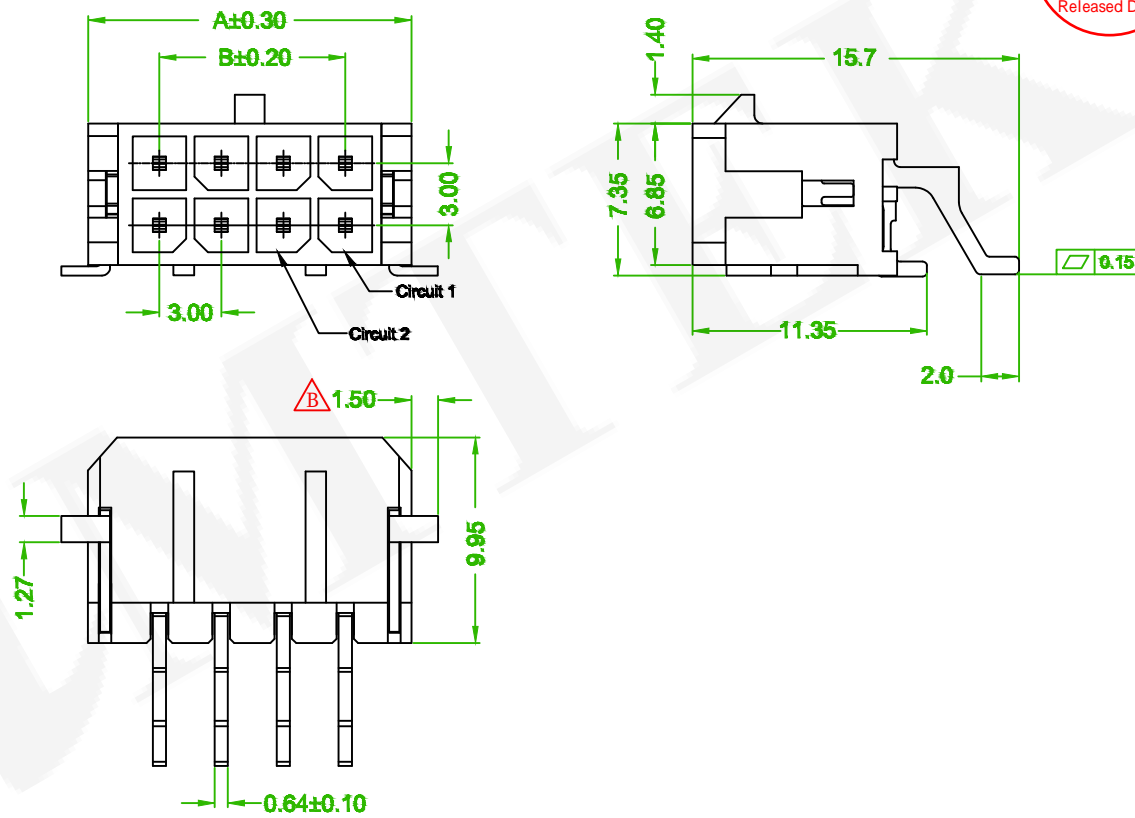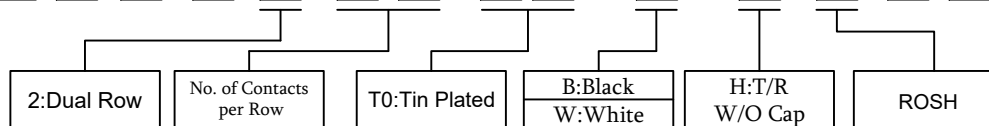

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	3.0mm WAFER S/R R/A SMT TYPE				頁數 Page	1/1
品號 PART NO.	5W3000H0-2XXT0XHUK01			繪圖 DRAWN	Alice 2021/12/16	
圖號 DRAWING NO.	GN137-AZ802	版本 REV.	B	核對 CHECKED	Josh 2021/12/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/12/16	
公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	QEC NO.:220104 Revise the drawing	Alice	2022/01/10
	ECN NO. OR DESCRIPTION	REVISED	DATE