
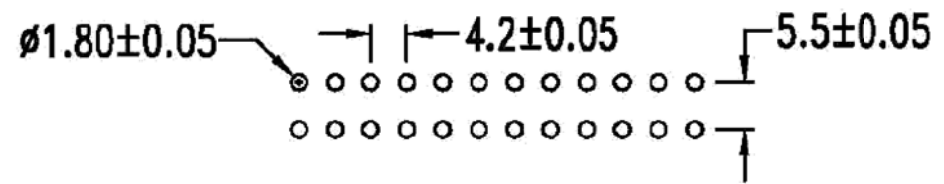
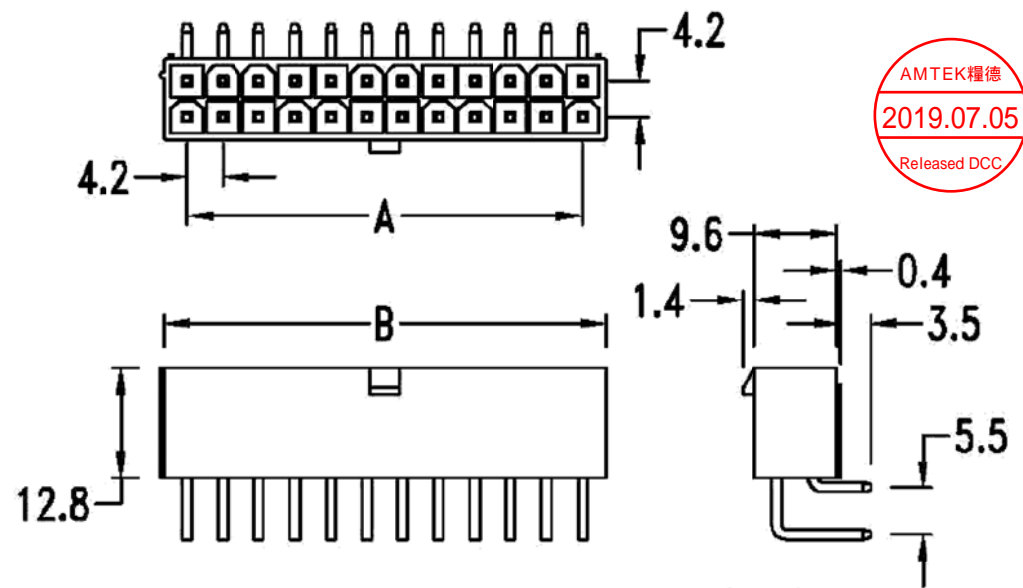
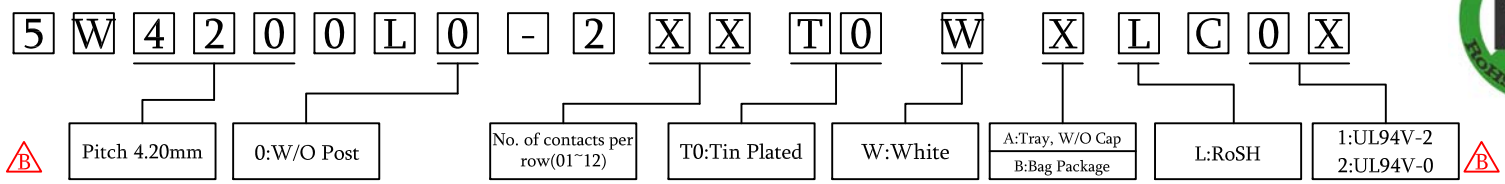


SPECIFICATIONS

Voltage Rating: 600V AC,DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2 or UL 94V-0 

ORDER INFORMATION






P. C. B . hole dimensions

Ordering and Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

Old P/N:4200RQ-2XXTW2-L


 x2	Add the Info: UL 94V-0, Add the Option.	Daniel	2019/07/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm RIGHT ANGLE HEADER			頁數 Page	1/3
	品號 PART NO.	5W4200L0-2XXT0WXLCOX			繪圖 DRAWN	Jeff 2016/08/08
	圖號 DRAWING NO.	GW083-DA235	版本 REV.	B	核對 CHECKED	Boris 2016/08/08
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/08
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	


V02_A3




2P




4P




6P




8P




10P




12P




14P




16P




18P




20P



22P



24P



Old P/N:4200RQ-2XXTW2-L

	Add the Info: UL 94V-0, Add the Option.	Daniel	2019/07/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm RIGHT ANGLE HEADER			頁數 Page	2/3
	品號 PART NO.	5W4200L0-2XXT0WXLC0X			繪圖 DRAWN	Jeff 2016/08/08
	圖號 DRAWING NO.	GW083-DA235	版本 REV.	B	核對 CHECKED	Boris 2016/08/08
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/08
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	




2P




4P




6P




8P




10P




12P




14P




16P




18P




20P



22P



24P



• Current rating and wire size:

Wire Size AWG	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

Old P/N:4200RQ-2XXTW2-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
x2	Add the Info: UL 94V-0, Add the option.	Daniel	2019/07/02

<p> 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030 </p>	品名 TITLE	4.2mm RIGHT ANGLE HEADER			頁數 Page	3/3
	品號 PART NO.	5W4200L0-2XXT0WXLC0X			繪圖 DRAWN	Jeff 2016/08/08
	圖號 DRAWING NO.	GW083-DA235	版本 REV.	B	核對 CHECKED	Boris 2016/08/08
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/08
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	