

ORDER INFORMATION

B H 1 A S - X X

X X

X -

L

No. of contacts
10-64

◎G:Gold Flash
SA:5u"
GB:10u"
GC:20u"
GD:30u"
TE:Tin 200u"

◎S:Selective
SA:5u"
SB:10u"
SC:20u"
SD:30u"

◎B:Black Insulator
W:White Insulator
Y:Gray Insulator
U:Blue Insulator

L:RoHS + P.B.T

◎Standard Recommend



SPECIFICATION

Current Rate:3 AMP
Insulation Resistance:1000M Ω Min.

Contact Resistance:20m Ω Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C


MATERIAL

Insulator:Polyester, UL 94V-0


◎Standard:P.B.T

Contact Pin:Brass

No. of Contacts	DIM A	DIM B	DIM C
10	10.16	18.02	20.32
12	12.70	20.56	22.86
14	15.24	23.10	25.40
16	17.78	25.64	27.94
18	20.32	28.18	30.48
20	22.86	30.72	33.02
22	25.40	33.26	35.56
26	30.48	38.34	40.64
30	35.56	43.42	45.72
34	40.64	48.50	50.80
40	48.26	56.12	58.42
50	60.96	68.82	71.12
60	73.66	81.52	83.82
64	78.74	86.60	88.90

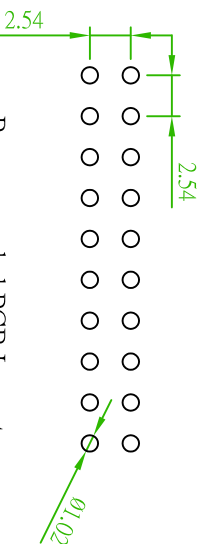

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

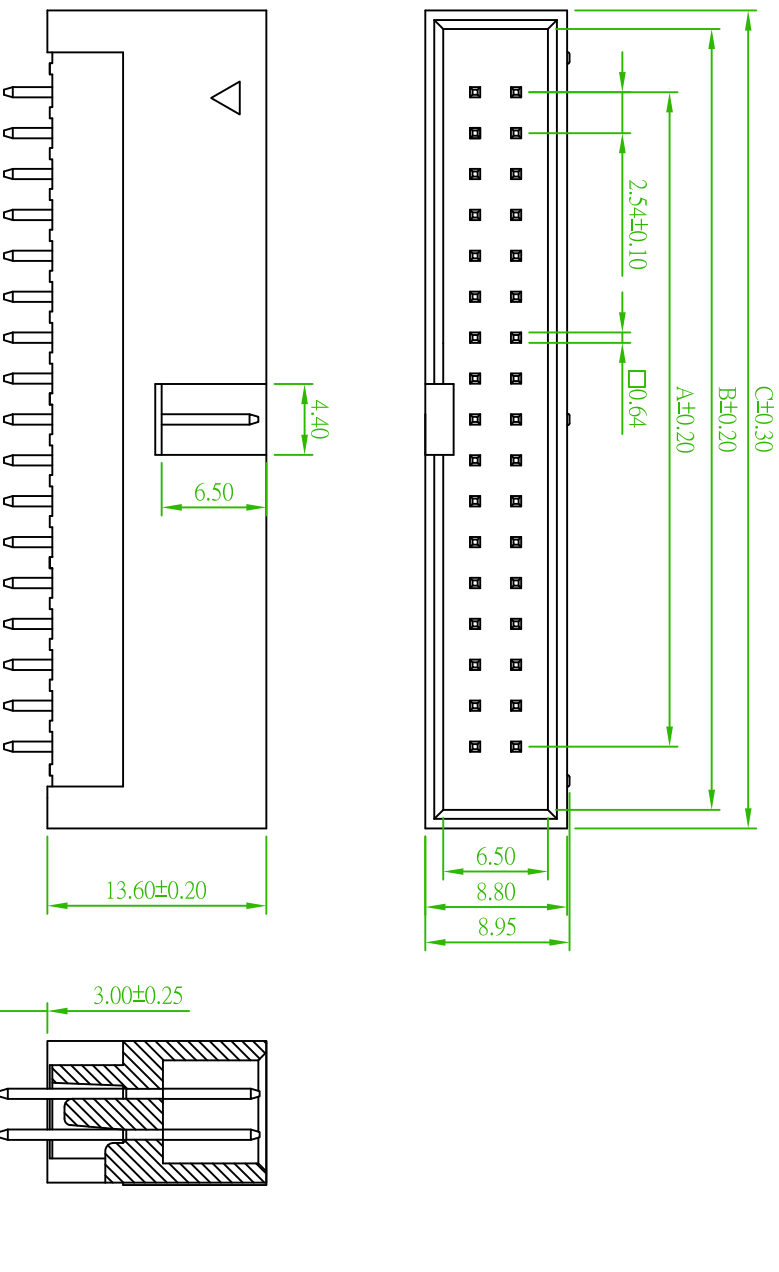

AREA	REV.	DESCRIPTION	DATE
△	D	Revised the No. of contacts: W/O 8P	2011/05/24 Simyus
△	C	Revised the No. of contacts: W/O 6P	2011/04/19 Simyus
△	B	Revised the option: G:Gray → Y:Gray	2010/10/14 Simyus

		品名 TITLE BOX HEADER 2.54mm 180° H=13.6mm	
		品號 PART NO. BH1AS-XX-L	
圖號 DRAWING NO. BH1AS-XX-L		版本 REV. D	
客戶品號 CUSTOMER P/N 公差 TOLERANCE		比例 SCALE FREE	
日期 DATE 04/09/2007		繪圖 DRAWN Kent	
單位 UNIT mm		核對 CHECKED Paul	
核准 APPROVED James		核對 CHECKED Paul	

禮德企業有限公司
 Amtek Technology Co., Ltd.
 TEL:86-25268-8836
 FAX:86-25268-8835