SPECIFICATION

Current Rate:3 AMP
Insulation Resistance:1000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0◎Standard:P.B.T
Contact Pin:Copper Alloy
FinishTin,Gold plated
◎Standard:Gold flash all over

ORDER INFORMATION

B H 1 S - X X X X X O X - L

- XX: No. of contacts 06~64
- X: ◎G:Gold Flash; S:Selective; GA:5u"; SA:5u"; GB:10u"; SB:10u"; GC:20u"; SC:20u"; GD:30u"; SD:30u"; T:Tin Plated; TE:Tin 200u"
- X: ◎B:Black Insulator; W:White Insulator; Y:Gray insulator; U:Blue insulator
- X: ◎O: W/O Cap; C: With Cap
- O: O: W/O Peg
- X: ◎A: Tray; T: Tube; R: Tape & Reel
- L: L:RoHS + P.B.T

◎:Standard Recommend

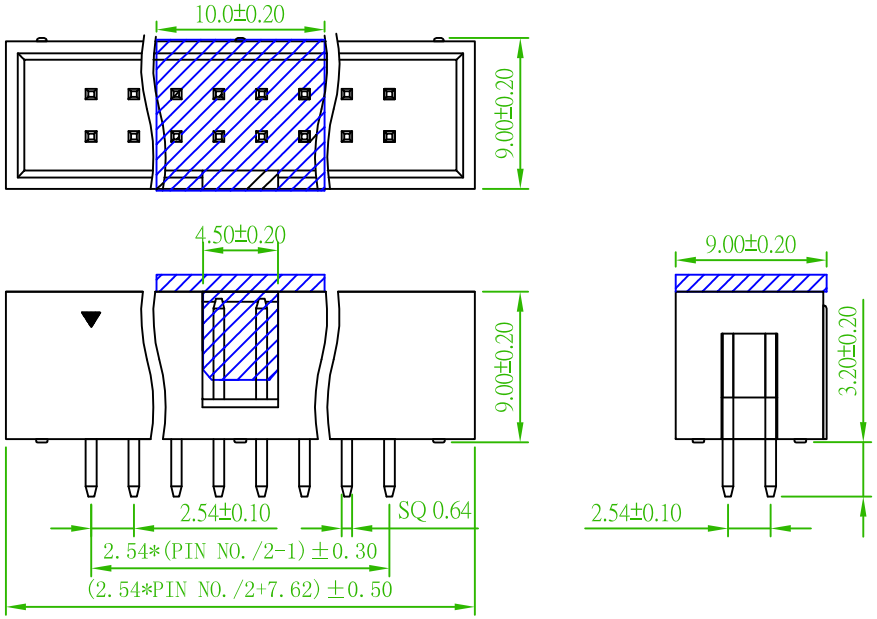

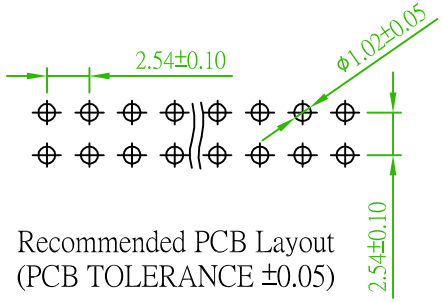

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

AREA	REV.	DESCRIPTION	DATE
B	B	Add the Peg & Packing Options	2011/08/12 Joe

糧德企業有限公司
Amtek Technology Co., Ltd.
TEL:886-2-2268-8036
FAX:886-2-2268-8035

品名 TITLE	BOX HEADER 2.54mm STRAIGHT TYPE				
品號 PART NO.	BH1S-XXGBXT-L			日期 DATE	2010/11/26
圖號 DRAWING NO.	BH1S-XX-L	版本 REV.	B	繪圖 DRAWN	Sinnys
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Shino
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	James