

ORDER INFORMATION

B H 2 S - X X

G

B

-

L

Black Insulator





L:RoHS + PBT



No. of contacts (04-64)	ⓄGold Flash	S:Selective
	GA:50"	SA:50"
	GB:100"	SB:100"
	GC:200"	SC:200"
	GD:300"	SD:300"
	T:Thin Plated	

ⓄStandard Recommendation

- NOTES:
- Current Rating:3AMP
 - Contact Resistance:20mΩ max
 - Withstand Voltage:550V AC/DC
 - Insulation Resistance:1000MΩ min
 - Operation Temperature:-40 °C to +105 °C
 - Contact Material:Brass
 - Contact plating: Au or Sn Over Ni
 - Insulator Material:Black
 - Insulator Material:High Temperature Thermoplastic+PBT(Ul94V-0)

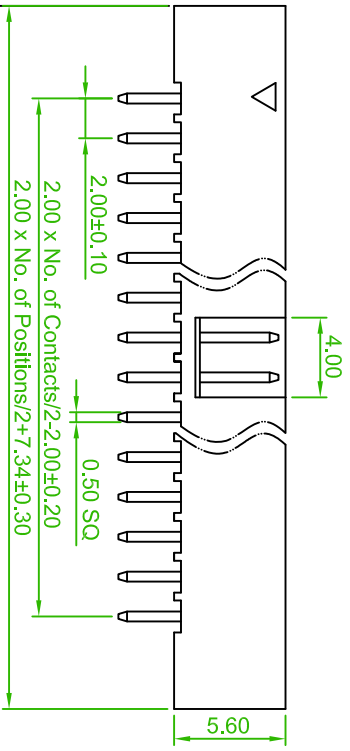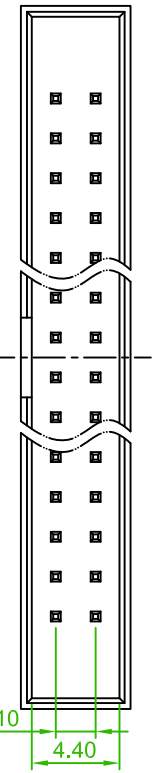

AREA	REV.	DESCRIPTION	DATE

<p>Amitek Technology Co., Ltd. Tel: 852-2258-9035 Fax: 852-2258-9035</p>		品名		BOX HEADER 2.0mm STRAIGHT	
		品號		BH2S-XX-L	
圖號		DRAWING NO.		BH2S-XX-L	
客戶品號		CUSTOMER P/N		X ±0.25 XX ±0.2	
公差		TOLERANCE		單位	
版本		REV.		A	
比例		SCALE		FREE	
單位		UNIT		mm	
日期		DATE		2009/05/20	
繪圖		DRAWN		Sam	
核對		CHECKED		Paul	
核准		APPROVED		James	