

### ORDER INFORMATION

D  B  R  1  -  F  0  9  X  B  1  D  -  S05  -  L


◎ Standard Recommend

No. of contacts	◎Gilded Finish GA50"	Shieldplate SA55"	Black Insulator	Driver & Jack screw Insert Height-(6)4.8	L:RoHS + PBT
	GB:10"	SB:10"	1:fork grounding		
	GC:20"	SC:20"			
	GD:30"	SD:30"			
	T:1Tin Plated				
	TE:1Tin 200u"				





### SPECIFICATION


Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min  
 Contact Resistance:20m Ω Max  
 Dielectric voltage:250V AC for one minute  
 Operation Temperature:-55°C to +105°C  
**MATERIAL**  
 Insulator:PBT+30% Glass Fiber(UL94V-0)  
 Terminal:Copper Alloy

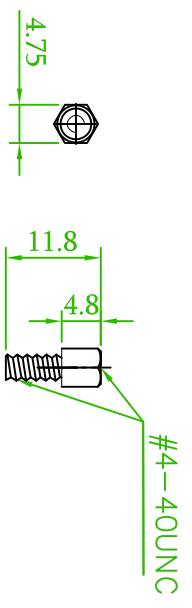


#4-40 unc screwlock installed

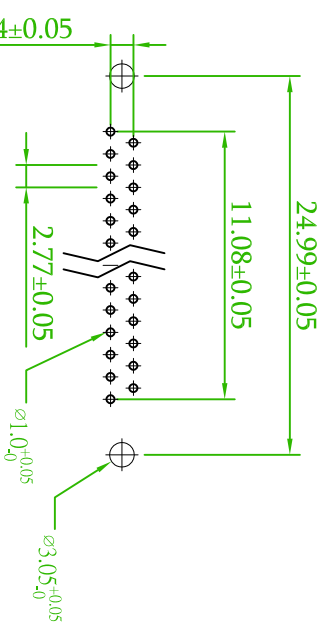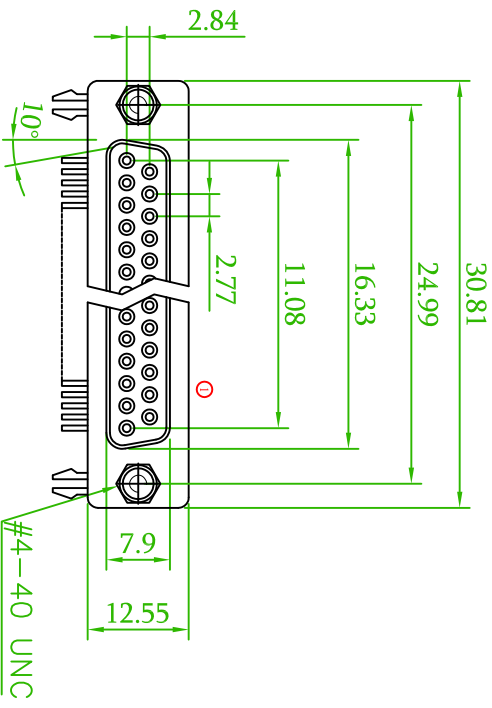

### RECOMMENDED PCB LAYOUT

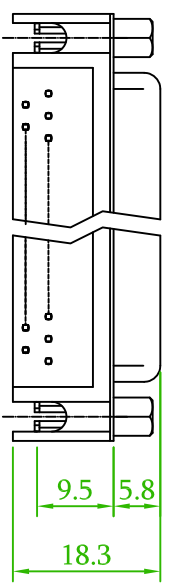

### 7.2mm Footpr int

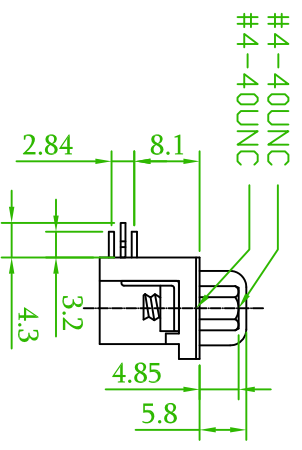

品名		D-SUB RIGHT ANGLE TYPE 7.2mm	
品號	DBR1-F09XB1D-S05-L	日期	2010/01/26
圖號	DBR1-F09XB1D-S05-L	繪圖	Simmys
客戶品號		比例	FREE
CUSTOMER P/N		CHECKED	Kelvin
公差	.XX ±0.25	單位	mm
TOLERANCE	.XX ±0.2	核對	James
圖號	DBR1-F09XB1D-S05-L	版本	A
DRAWING NO.	DBR1-F09XB1D-S05-L	核對	Simmys
品號	DBR1-F09XB1D-S05-L	核對	Kelvin
PART NO.	DBR1-F09XB1D-S05-L	核對	James

AREA	REV.	DESCRIPTION	DATE

耀德企業有限公司  
 Amitek Technology Co., Ltd.  
 TEL:886-2-2268-8036  
 FAX:886-2-2268-8033