

SPECIFICATION

Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 20m Ω Max
 Dielectric Voltage: 250V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: PBT+30% Glass Fiber (UL94V-0)
 Terminal: Copper Alloy

ORDER INFORMATION


D B R 1 - M 0 9 X B 1 D - S05 - L

◎ Standard Recommend




No. of contacts	◎Gilded Finish	Spinel/epoxy	Black Insulator	Drifted & Jack screw Insert Height (S) 4.8	L: RoHS + PBT
	GA50"	SA35"			
	GB:10"	SB:10"			
	GC:20"	SC:20"			
	GD:30"	SD:30"			
	T: Tin Plated				
	TE: Tin 200u"				

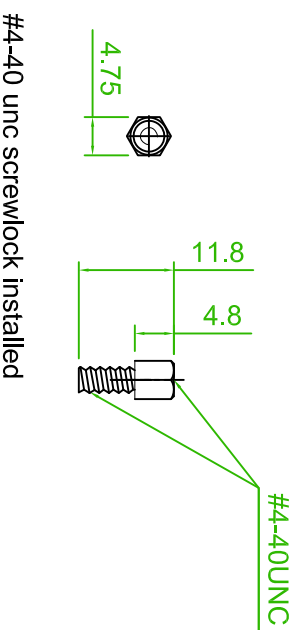

#4-40 unc screwlock installed

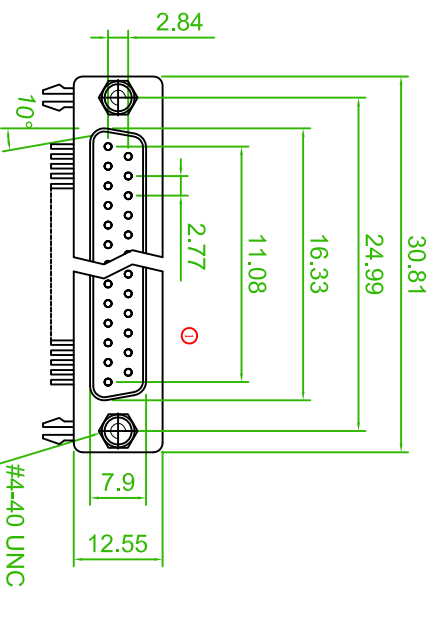

#4-40 UNC

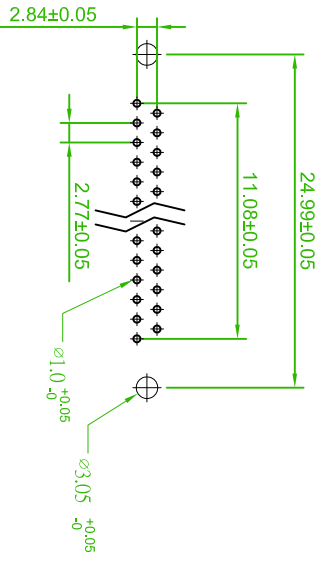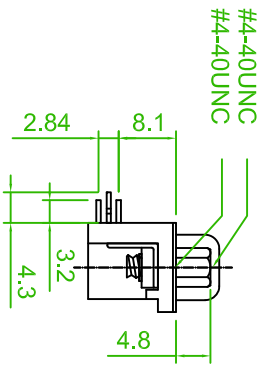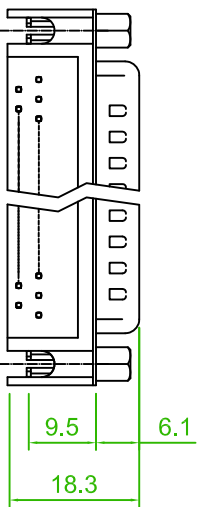

RECOMMENDED PCB LAYOUT

7.2mm Footpr int



AREA	REV.	DESCRIPTION	DATE

 <p>耀德企業有限公司 Amitek Technology Co., Ltd. E: sales@amitek.com F: 886-2-2285-5006 F: 886-2-2285-5008</p>		<p>品名 TITLE</p> <p>品號 PART NO.</p> <p>圖號 DRAWING NO.</p> <p>客戶品號 CUSTOMER P/N</p> <p>公差 TOLERANCE</p>		<p>D-SUB RIGHT ANGLE TYPE 7.2mm</p> <p>DBR1-M09B1D-S05-L</p> <p>DBR1-M09B1D-S05-L</p>		
版本 REV. <td>比例 SCALE <td>單位 UNIT <td>日期 DATE <td>繪圖 DRAWN <td>核對 CHECKED <td>核准 APPROVED </td></td></td></td></td></td>	比例 SCALE <td>單位 UNIT <td>日期 DATE <td>繪圖 DRAWN <td>核對 CHECKED <td>核准 APPROVED </td></td></td></td></td>	單位 UNIT <td>日期 DATE <td>繪圖 DRAWN <td>核對 CHECKED <td>核准 APPROVED </td></td></td></td>	日期 DATE <td>繪圖 DRAWN <td>核對 CHECKED <td>核准 APPROVED </td></td></td>	繪圖 DRAWN <td>核對 CHECKED <td>核准 APPROVED </td></td>	核對 CHECKED <td>核准 APPROVED </td>	核准 APPROVED
A <td>FREE <td>mm <td>2010/02/02 <td>Sam <td>Kelvin <td>James </td></td></td></td></td></td>	FREE <td>mm <td>2010/02/02 <td>Sam <td>Kelvin <td>James </td></td></td></td></td>	mm <td>2010/02/02 <td>Sam <td>Kelvin <td>James </td></td></td></td>	2010/02/02 <td>Sam <td>Kelvin <td>James </td></td></td>	Sam <td>Kelvin <td>James </td></td>	Kelvin <td>James </td>	James