
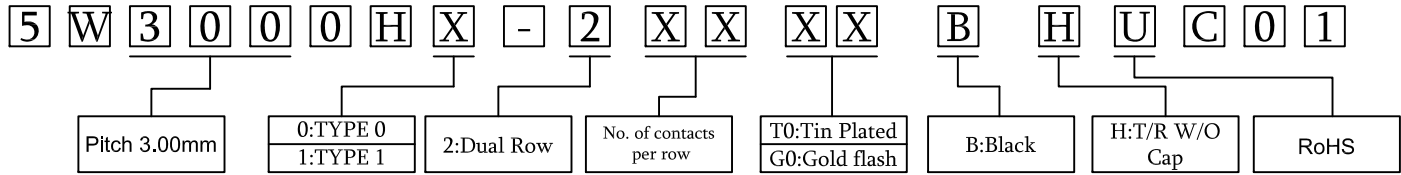


### SPECIFICATIONS



Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Operation temperature: -40°C to +105°C   
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Copper Alloy/Tin-plated  
 Material: LCP,UL94V-0

### ORDER INFORMATION




5W3000H1


5W3000H0

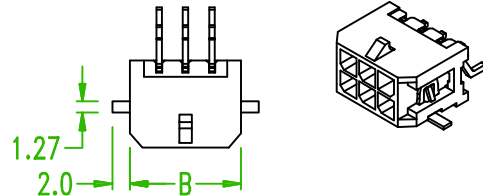

No. of contacts	Dim. A	Dim. B
2x01	---	6.65
2x02	3.00	9.65
2x03	6.00	12.65
2x04	9.00	15.65
2x05	12.00	18.65
2x06	15.00	21.65
2x07	18.00	24.65
2x08	21.00	27.65
2x09	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

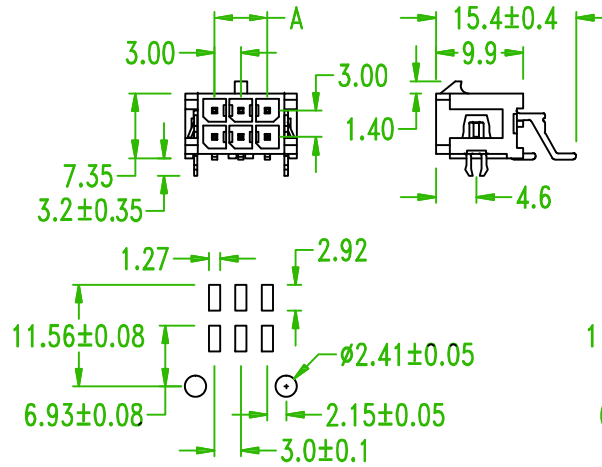

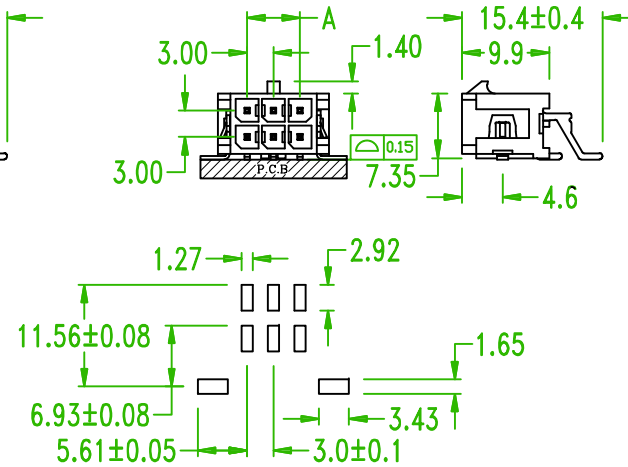


PCB Layout: Component side



PCB Layout: Component side



Old Part No.:3000MR-2XXTBX-U

	Increase plating option	Eric	2019/03/06
	Revise operation temperature	Jeff	2017/02/06
	Revised the Drawing	Jeff	2017/02/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	3.0mm WAFER SMT R/A				頁數 Page	1/1
品號 PART NO.	5W3000HX-2XXXXBHUC01			繪圖 DRAWN	Jeff 2016/11/21	
圖號 DRAWING NO.	GW083-JF030	版本 REV.	D	核對 CHECKED	Josh 2019/03/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/03/06	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	