

ORDER INFORMATION

P H 1 D 2 5 - 1 X X X X A/L1/B - L


◎:Standard Recommend

No. of contacts per row (02-50)	◎:Gold Flash GA:50" GB:100" GC:200" GD:300"	S:selective SA:50" SB:100" SC:200" SD:300"	◎:Black Insulator W:White Insulator G:Mylon natural	Fill In Dimension For Special Design	L:RoHS + P.B.T
◎:Tin Plated TE:1in 200u"					



SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:5000M Ω Min.
 Contact Resistance:10m Ω Max.
 Dielectric voltage:100V AC for one minute
 Operation Temperature:-40 °C to +105 °C
MATERIAL
 Insulator:Polyester, UL 94V-0◎Standard:P.B.T
 Contact Pin:Brass
 Tin,Gold plated◎Standard:Gold flash all over

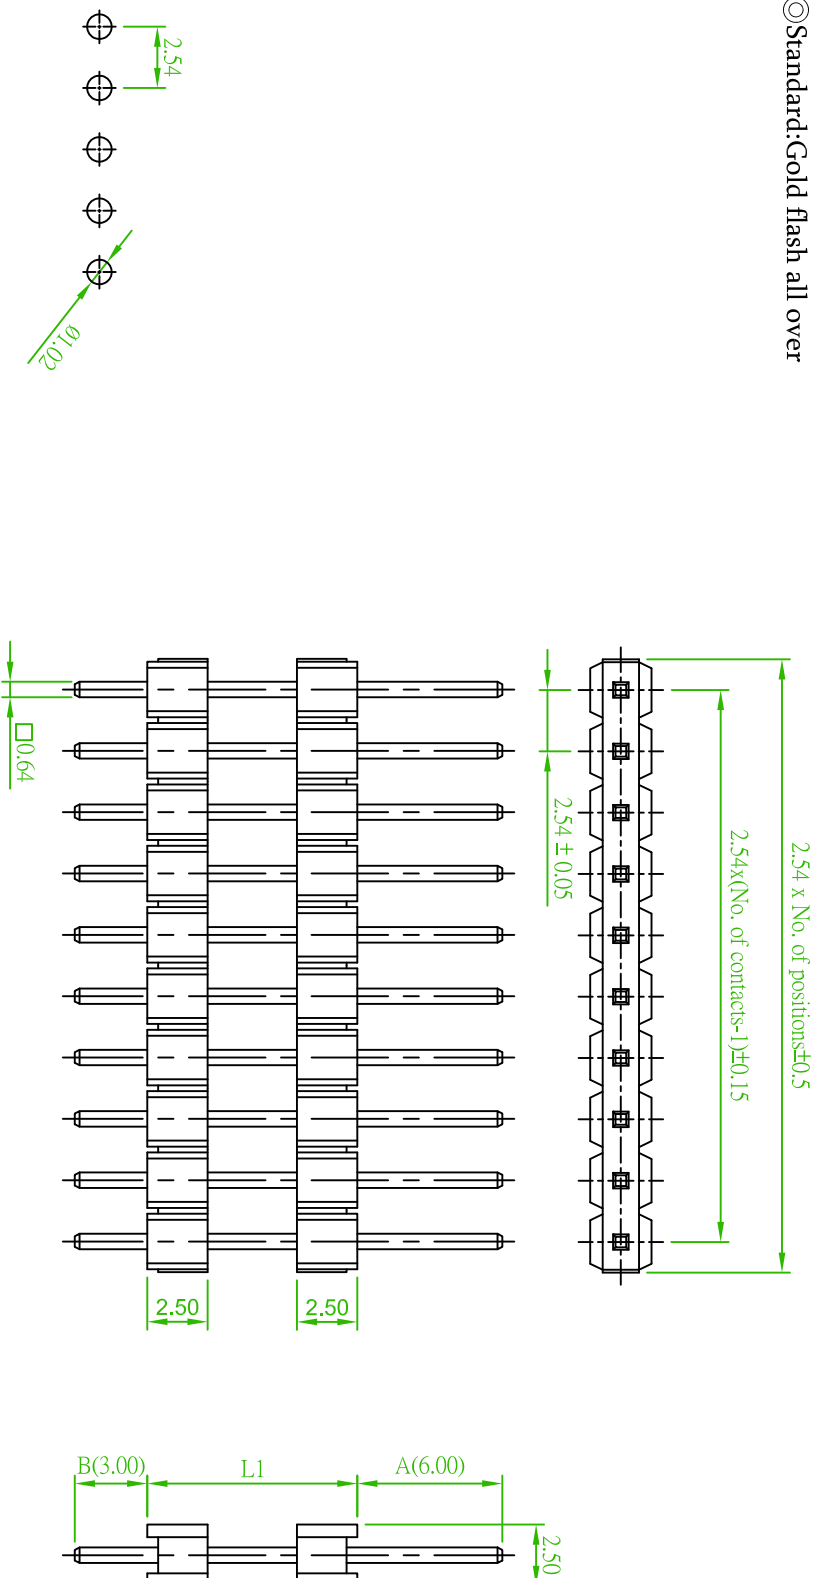

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

AREA		REV.	DESCRIPTION	DATE
品名 TITLE PIN HEADER 2.54mm STACK STRAIGHT TYPE 品號 PART NO. PH1D25-1XX-L 圖號 DRAWING NO. PH1D25-1XX-L 客戶品號 CUSTOMER P/N 公差 TOLERANCE X ±0.35 XX ±0.25 單位 UNIT mm 核對 CHECKED Paul 繪圖 DRAWN Kent 日期 DATE 08/02/2005 核准 APPROVED James				
耀德企業有限公司 Amitek Technology Co., Ltd. T13A866-2208-8036 T13A866-2208-8035				