





ORDER INFORMATION

P H 2 R 1 5 - 2 X X X B A/B/C - U



Standard Recommend

No. of contacts per row (2-40)	Ⓞ:Gold Flash	S:Selective	B:Black Insulator	Fill in Dimension For Special Design	U:Rohs + Nylon 6T
	GA:50"	SA:50"			
	GB:100"	SB:100"			
	GC:200"	SC:200"			
	GD:300"	SD:300"			
		T: Tin Plated			
		TE: Tin 200u"			

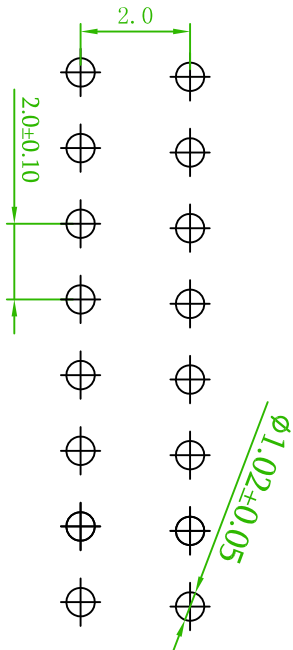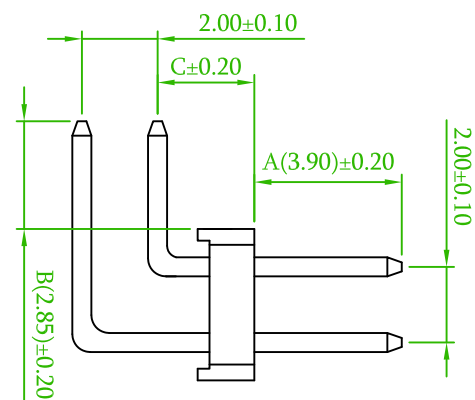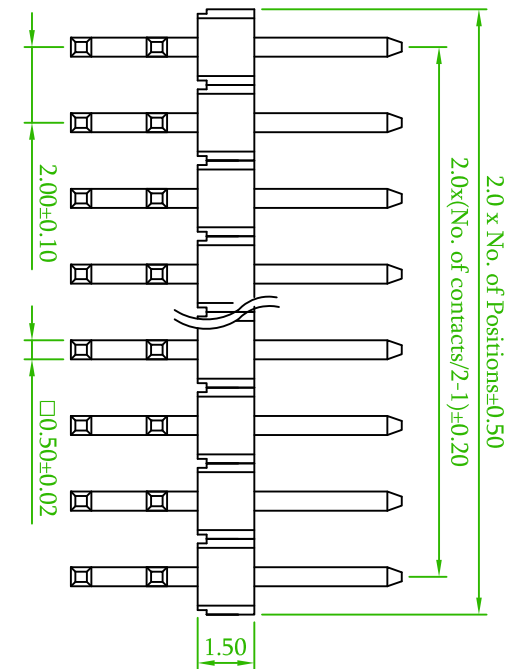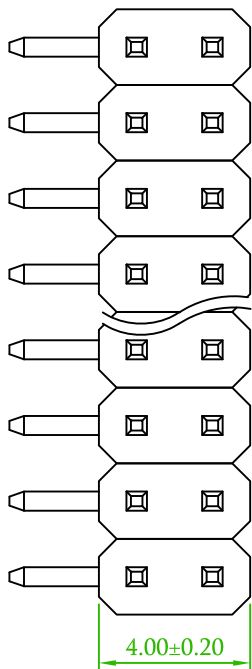

Recommended PCB Layout
(PCB TOLBRANCE ±0.05)

Specifications
 Current Rate: 2 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C
Material
 Insulator: Polyester, UL 94V-0
 Standard: Nylon-6T
 Terminal: Copper Alloy

AREA		REV.	DESCRIPTION	DATE
PIN HEADER 2.0mm RIGHT ANGLE TYPE PLASTIC HEIGHT 1.5mm				
品名	品號	圖號	客戶品號	公差
TITLE	PART NO.	DRAWING NO.	CUSTOMER P/N	TOLERANCE
PH2R15-2XX-U	PH2R15-2XX-U	PH2R15-2XX-U		.X ±0.25 .XX ±0.20
版本	比例	FREE	核對	日期
REV.	SCALE	CHECKED	DRAWN	DATE
A	FREE	Joe	Joe	2010/11/24
單位	核對	核對	核對	核對
mm	CHECKED	CHECKED	CHECKED	CHECKED
James	James	James	James	James

耀德企業有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2768-8055
 FAX: 886-2-2768-8055