

Electrical

Standard: UL IEC
 Rated Voltage: 300V 320V
 Rated Current: 15A 20A
 Contact Resistance: 20MΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ / DC 500V

Mechanical

Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0
 Pin Header: Brass, Tin Plated

Dimensions

Pitch: 7.62mm
 Poles: 2P-24P




ORDER INFORMATION

TB2ERC - 7.62 - X X P 1 - X - 0 0 0 A
 Customer Request

Series No. Pitch No. of Pole 1:Single Pitch

1:Gray 2:Blue 3:Black 4:Green 5:Orange 6:Red 7:Transparent 8:Brown 9:White


L:RoHS + Nylon66

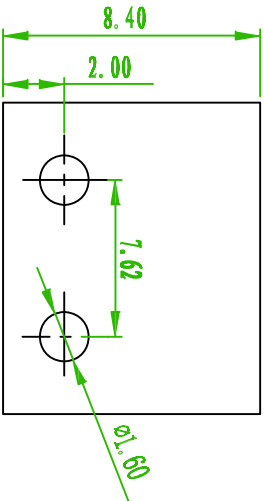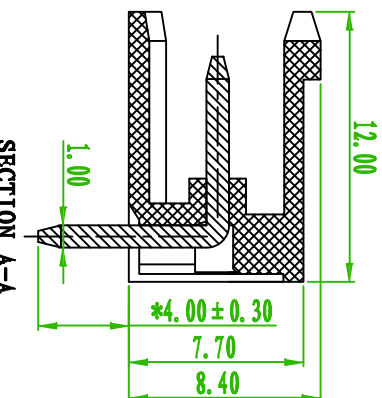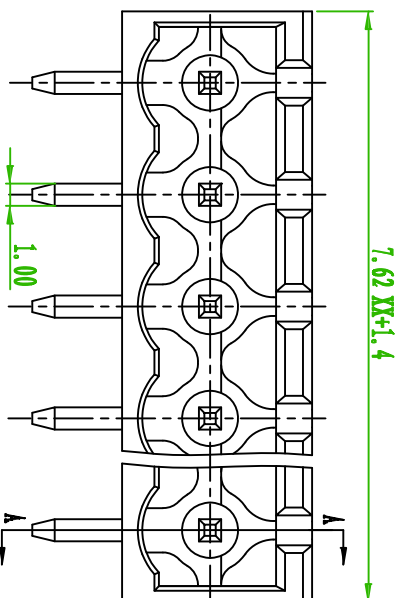

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	character	short angle sid	short angle sid	□	//
variable range	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to all	over 6 to 10	over 10 to 50	over 50 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1
	6 to 30	30 to 120	120 to 480	480 to all	6 to 10	10 to 50	50 to 120
	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1
	6 to 30	30 to 120	120 to 480	480 to all	6 to 10	10 to 50	50 to 120
	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1

AREA	REV.	DESCRIPTION	DATE
B		Revised the Drawing & Spec.	2011/10/18
			Joe

 <p>Amtek Technology Co., Ltd. 緯德企業有限公司 E: sales@amtek.com.tw F: +886-2-2286-8888</p>		<p>TB2ERC-7.62-XXP-1X-00A-L</p>	
品名	TITLE	品號	PART NO.
圖號	DRAWING NO.	客戶品號	CUSTOMER P/N
公差	TOLERANCE	版本	REV.
		比例	SCALE
單位	UNIT	日期	DATE
mm	mm	繪圖	DRAWN
		核對	CHECKED
		核准	APPROVED
		Joe	Paul
		2008/12/03	James

