



Material

Housing: PBT, UL94V-0
 Pin header: Brass, Tin plated
 Electrical

Rated voltage: 300V
 Rated current: 10V
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: AC2000V/1Min
 Mechanical

Temp. Range: -30°C~+120°C
 MAX Soldering: +250°C, for 5 Sec.

ORDER INFORMATION

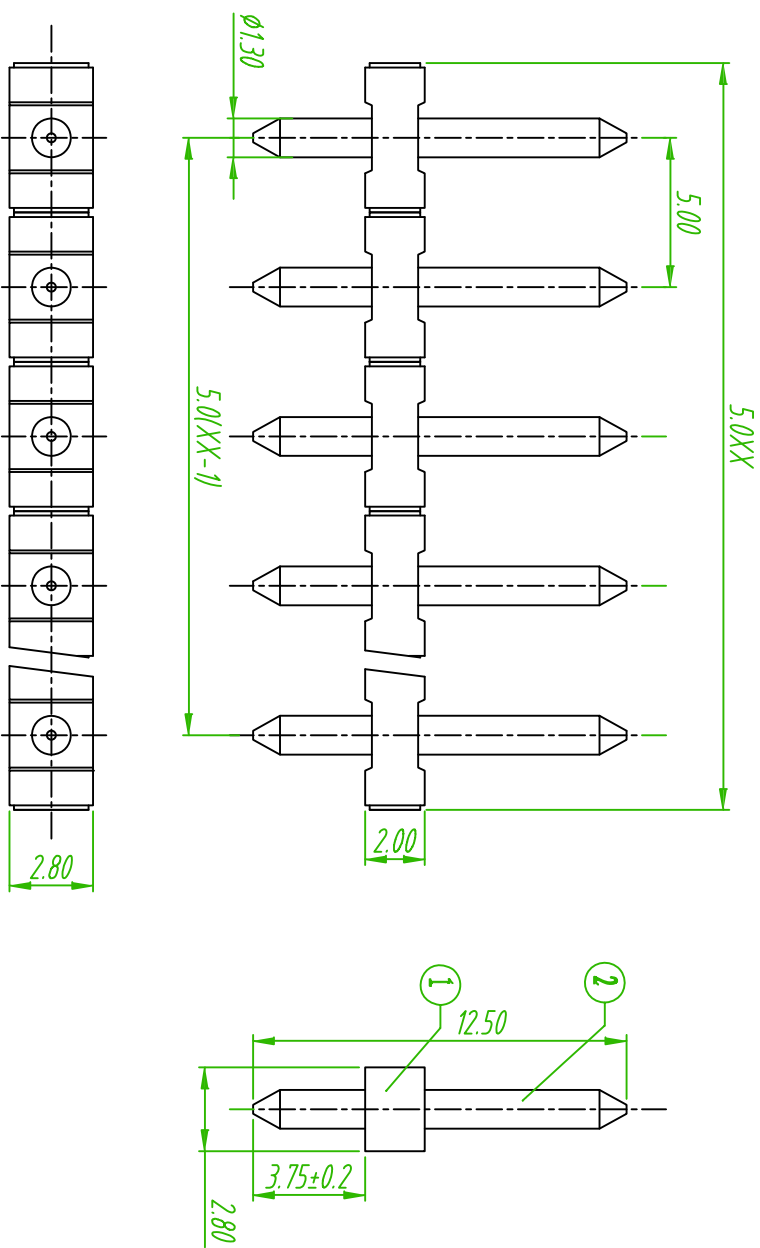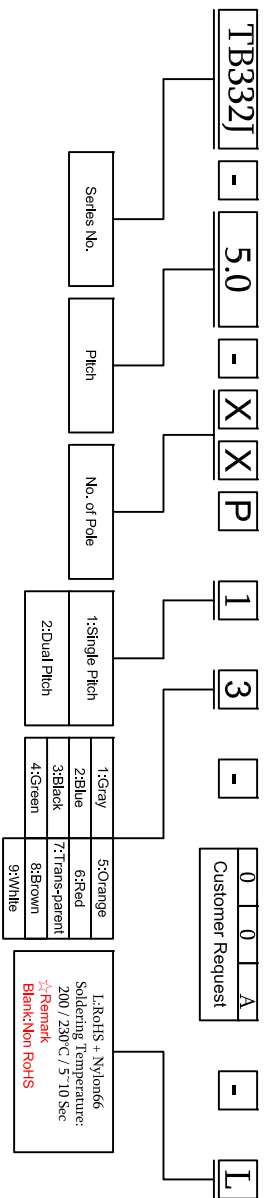

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	character	short angle sid		⊥
variable range	6 over to 30 over to 120 over to 480 over to	all	6 over to 6 over to 10 over to 10 over to 50 over to 50 over to 120 over to	all to 5 to 30 to 120 to	5 over to 30 over to 120 over to	
tolerance	±0.1 ±0.2 ±0.3 ±0.5 ±0.9	±0.2	±0.5 ±1 ±1	1° 30' 20' 10'	0.5 0.025 0.06 0.12 0.4	

AREA	REV.	DESCRIPTION	DATE

Amitek
TEL: 86-25-268-8836
FAX: 86-25-268-8833

耀德企業有限公司
Amitek Technology Co., Ltd.

品名	TB332J-5.0-XXXP-13-00A-L		
品號	TB332J-5.0-XXXP-13-00A-L		
圖號	DRAWING NO.		
客戶品號	CUSTOMER P/N		
公差	TOLERANCE		
	X ±0.35 XX ±0.25		
版本	REV. A		
比例	SCALE FREE		
單位	UNIT mm		
日期	DATE 2009/05/20		
繪圖	DRAWN Sam		
核對	CHECKED Paul		
核准	APPROVED James		