SPECIFICATIONS

Rating: DC 5V 10mA
Contact Resistance: 100mΩ Max.
Operating temperature: -40°C ~ +85°C
Life:100,000 Cycles

ORDER INFORMATION

6	4	S	W	T	-	E	E	6	B	3	2	6

- E: Lever & Push Switch
- E: SMT,Bag
- No. of Contact
- B: Black

certified Pb RoHS Compliant

AMTEK糧德
2020.08.04
Released DCC

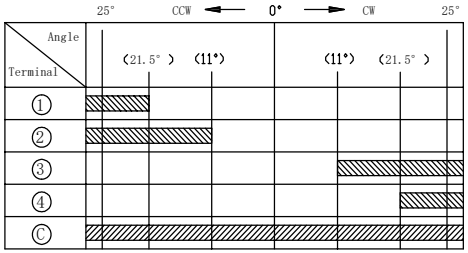

No	ITEM	MATERIAL	PLATING
1	STEM	PA9T	
2	FRAME	PA6T	
3	CONTACT	PHOSPHOR BRONZE	Ag plating
4	SPRING	SUS301	
5	HUSING	SUS301	
6	TERMINAL	PHOSPHOR BRONZE	Tin plating

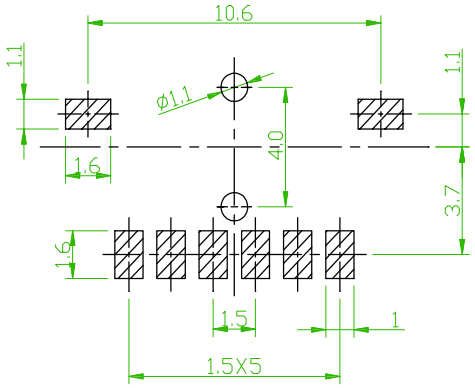

Recommended PCB Layout
(PCB TOLERANCE ±0.1)



Circuit Diagram

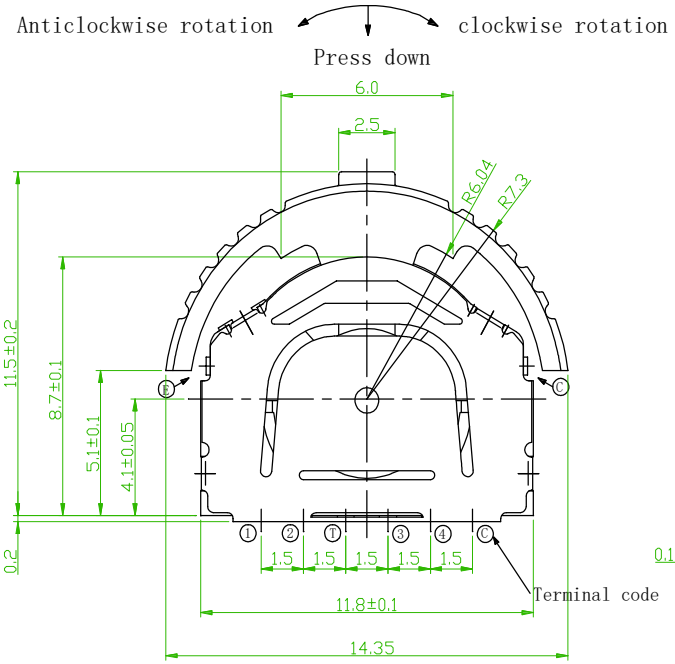

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	LEVER & PUSH SWITCH			頁數 Page	1/1
品號 PART NO.	64SWT-EE6B326			繪圖 DRAWN	Benosn 2020/08/04
圖號 DRAWING NO.	GW173-BN266	版本 REV.	A	核對 CHECKED	Josh 2020/08/04
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/08/04
公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	