

ORDER INFORMATION

Specifications
 Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 30m Ω Max
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C

Material
 Insulator: PBT+30% Glass Fiber (UL94V-0)
 Contact Pin: Phosphor Bronze or Brass

H D B R - M X X X X X X - L

No. of contacts

GC: Gold Flash	GA: 50"	GB: 100"	GC: 200"	GD: 300"
SS: Selective	SA: 50"	SB: 100"	SC: 200"	SD: 300"




⊙: Standard Recommend

⊙: B: Black Insulator
 U: Blue Insulator

⊙: 1: With Fork grounding
 2: W/O Fork grounding


A: Jack screw insert
 B: Rivet
 C: Rivet & Jack screw attached
 D: Rivet & Jack screw insert
 E: Front rivet #4-40
 F: Non accessories
 H: Rivet M3 & Jack screw insert

L: R:HS + P:B:T

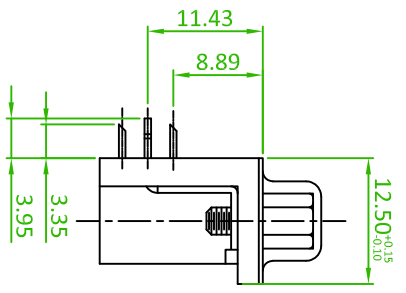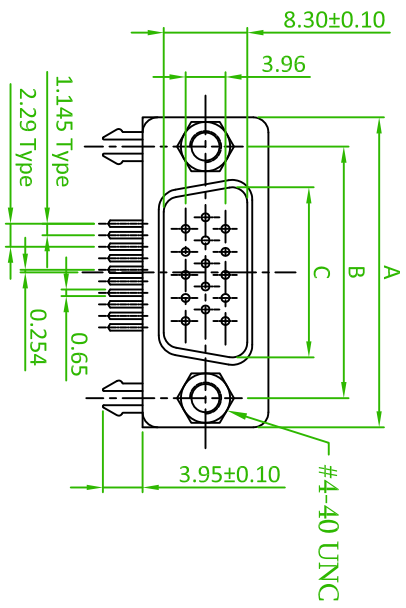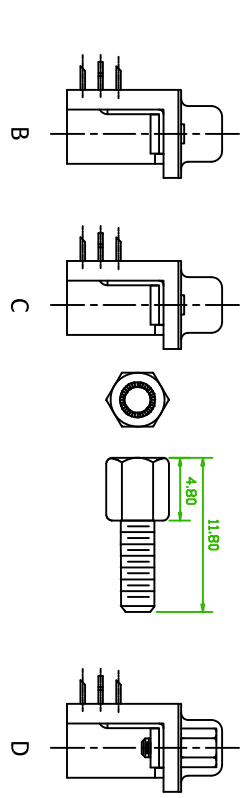

POS.	A	B	C
15	30.80	24.99	16.90
26	39.20	33.32	25.30
44	53.10	47.04	39.00

A	Delete the Tin Plating Options	2011/06/07
D	Revised the Drawing & Dimensions	2011/03/30
C	Add the option: H: Rivet M3 & Jack screw insert	2010/11/26
REV.	DESCRIPTION	DATE



Amtek Technology Co., Ltd.
 17A, 18A, 19A, 20A, 21A, 22A, 23A, 24A, 25A, 26A, 27A, 28A, 29A, 30A, 31A, 32A, 33A, 34A, 35A, 36A, 37A, 38A, 39A, 40A, 41A, 42A, 43A, 44A, 45A, 46A, 47A, 48A, 49A, 50A, 51A, 52A, 53A, 54A, 55A, 56A, 57A, 58A, 59A, 60A, 61A, 62A, 63A, 64A, 65A, 66A, 67A, 68A, 69A, 70A, 71A, 72A, 73A, 74A, 75A, 76A, 77A, 78A, 79A, 80A, 81A, 82A, 83A, 84A, 85A, 86A, 87A, 88A, 89A, 90A, 91A, 92A, 93A, 94A, 95A, 96A, 97A, 98A, 99A, 100A

品名 TITLE		D-SUB HIGH DENSITY RIGHT ANGLE TYPE	
品號 PART NO.		HDBR-MXX-L	
圖號 DRAWING NO.		HDBR-MXX-L	
客戶品號 CUSTOMER P/N		X ±0.38	
公差 TOLERANCE		.XX ±0.25	
版本 REV.	E	繪圖 DRAWN	Sinnys
比例 SCALE	FREE	核對 CHECKED	Paul
單位 UNIT	mm	核准 APPROVED	James
日期 DATE	2008/11/10		

