
ROUND TYPE LED LAMPS



Lead-Free Parts

LWK73433Z-WW-D01

DATA SHEET


DOC. NO : QW0905-LWK73433Z-WW-D01

REV. : A

DATE : 15 - Aug. - 2011




Package Dimensions

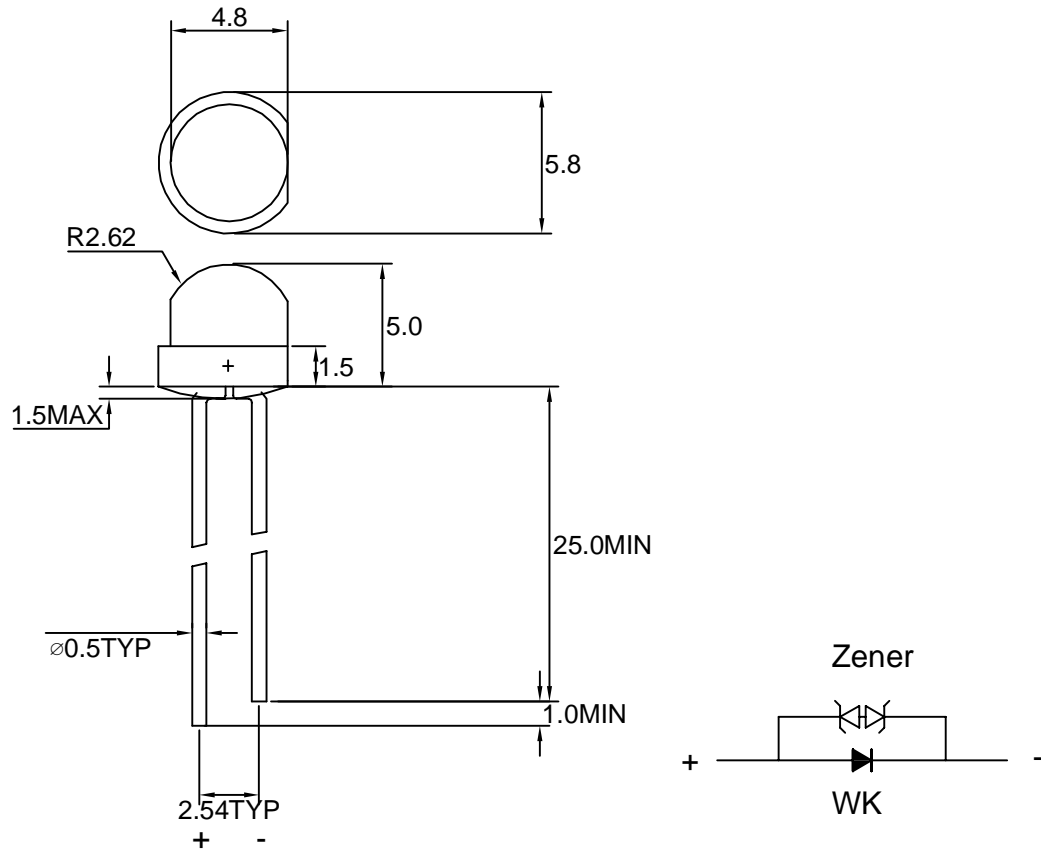

Note : 1.All dimension are in millimeter tolerance is ± 0.25 mm unless otherwise noted.
2.Specifications are subject to change without notice.

Directivity Radiation

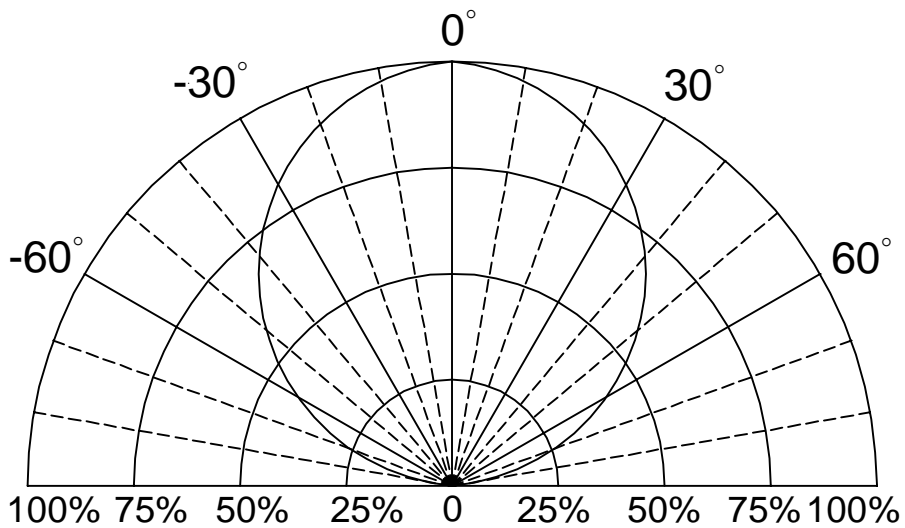

Absolute Maximum Ratings at Ta=25 °C

| Parameter | Symbol | Ratings | UNIT |
|---|--------|-----------|------|
| | | WK | |
| Forward Current | IF | 30 | mA |
| Peak Forward Current Duty 1/10@10KHz | IFP | 100 | mA |
| Power Dissipation | PD | 80≤PD≤120 | mW |
| Reverse Current @5V | Ir | 10 | μA |
| Electrostatic Discharge(*) | ESD | 8000 | V |
| Operating Temperature | Topr | -30~ +80 | °C |
| Storage Temperature | Tstg | -40~ +100 | °C |

* Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handing these LED. All devices, equipment and machinery must be properly grounded.

Typical Electrical & Optical Characteristics (Ta=25 °C)

| PART NO | MATERIAL | COLOR | | Chromaticity Coordinates (Typ.) | | CRI @20 mA | CCT @20 mA | | Forward voltage @20mA(V) | | Luminous intensity @20mA(mcd) | | Luminous intensity @20mA(LM) | | Viewing angle 2θ 1/2 (deg) |
|------------------|-----------|---------|-------------|---------------------------------|------|------------|------------|------|--------------------------|------|-------------------------------|------|------------------------------|------|----------------------------|
| | | Emitted | Lens | X | Y | Min. | Min. | Max. | Min. | Max. | Min. | Typ. | Min. | Typ. | |
| LWK73433Z-WW-D01 | InGaN/GaN | White | Water Clear | 0.43 | 0.41 | 80 | 2670 | 3500 | 2.8 | 3.5 | 1300 | 1800 | 4 | 4.2 | 110 |


Note : 1.The forward voltage data did not including ±0.1V testing tolerance.
 2. The luminous intensity data did not including ±15% testing tolerance.
 3.The CRI data did not including ±2% testing tolerance.

. Chromaticity Coordinates Specifications for Bin Grading

| BIN | X1 | Y1 | X2 | Y2 | X3 | Y3 | X4 | Y4 | TC (K) | |
|-----|----|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| M | MM | 0.4710 | 0.4510 | 0.4610 | 0.4330 | 0.4770 | 0.4370 | 0.4870 | 0.4540 | 2670-2850K |
| | MN | 0.4610 | 0.4330 | 0.4530 | 0.4160 | 0.4670 | 0.4200 | 0.4770 | 0.4370 | |
| | MO | 0.4530 | 0.4160 | 0.4440 | 0.3990 | 0.4580 | 0.4030 | 0.4670 | 0.4200 | |
| | MP | 0.4580 | 0.4030 | 0.4440 | 0.3990 | 0.4360 | 0.3840 | 0.4490 | 0.3880 | |
| N | NM | 0.4540 | 0.4460 | 0.4460 | 0.4290 | 0.4610 | 0.4330 | 0.4710 | 0.4510 | 2850-3050K |
| | NN | 0.4460 | 0.4290 | 0.4380 | 0.4120 | 0.4530 | 0.4160 | 0.4610 | 0.4330 | |
| | NO | 0.4380 | 0.4120 | 0.4290 | 0.3940 | 0.4440 | 0.3990 | 0.4530 | 0.4160 | |
| | NP | 0.4440 | 0.3990 | 0.4290 | 0.3940 | 0.4220 | 0.3790 | 0.4360 | 0.3840 | |
| P | PM | 0.4380 | 0.4400 | 0.4310 | 0.4230 | 0.4460 | 0.4290 | 0.4540 | 0.4460 | 3050-3250K |
| | PN | 0.4310 | 0.4230 | 0.4240 | 0.4070 | 0.4380 | 0.4120 | 0.4460 | 0.4290 | |
| | PO | 0.4240 | 0.4060 | 0.4160 | 0.3890 | 0.4290 | 0.3940 | 0.4380 | 0.4120 | |
| | PP | 0.4290 | 0.3940 | 0.4160 | 0.3890 | 0.4100 | 0.3740 | 0.4220 | 0.3790 | |
| Q | QM | 0.4210 | 0.4330 | 0.4150 | 0.4160 | 0.4310 | 0.4230 | 0.4380 | 0.4400 | 3250-3500K |
| | QN | 0.4150 | 0.4160 | 0.4090 | 0.4000 | 0.4240 | 0.4070 | 0.4310 | 0.4230 | |
| | QO | 0.4090 | 0.4000 | 0.4020 | 0.3820 | 0.4160 | 0.3890 | 0.4240 | 0.4060 | |
| | QP | 0.4160 | 0.3890 | 0.4020 | 0.3820 | 0.3970 | 0.3670 | 0.4100 | 0.3740 | |

Note : 1.The Chromaticity Coordinates data did not including ± 0.005 testing tolerance.

. CIE Chromaticity Diagram

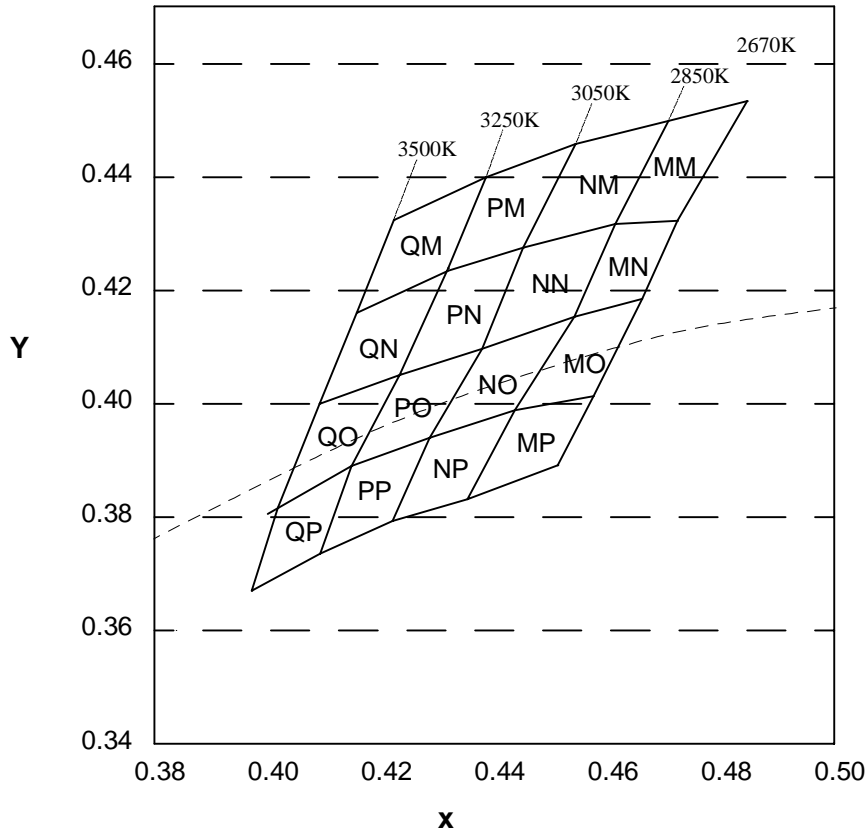

Typical Electro-Optical Characteristics Curve

WK CHIP

Fig.1 Forward current vs. Forward Voltage

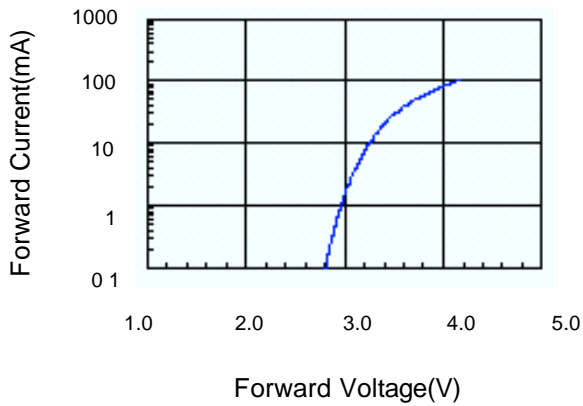


Fig.2 Relative Intensity vs. Forward Current

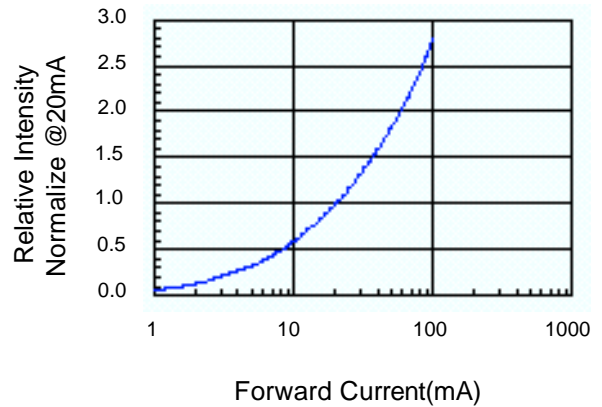


Fig.3 Forward Voltage vs. Temperature

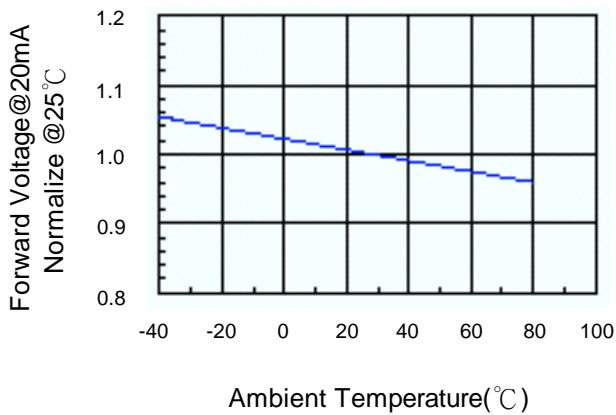


Fig.4 Relative Intensity vs. Temperature


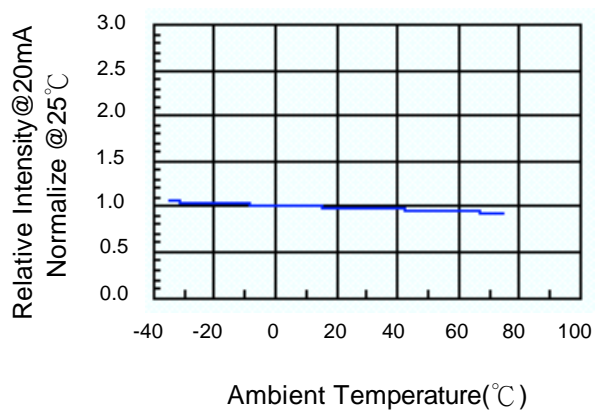


Fig.5 Luminous Spectrum (Ta=25°C)

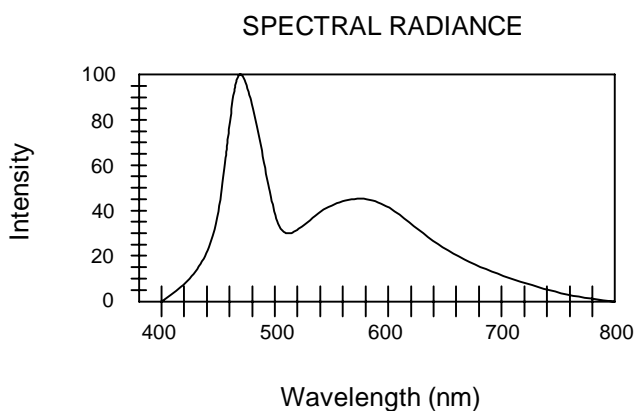


Soldering Condition(Pb-Free)**1.Iron:**

Soldering Iron:30W Max
Temperature 350° C Max
Soldering Time:3 Seconds Max(One time only)
Distance:2mm Min(From solder joint to body)

2.Wave Soldering Profile

Dip Soldering
Preheat: 120° C Max
Preheat time: 60seconds Max
Ramp-up
2° C/sec(max)
Ramp-Down:-5° C/sec(max)
Solder Bath:260° C Max
Dipping Time:3 seconds Max
Distance:2mm Min(From solder joint to body)

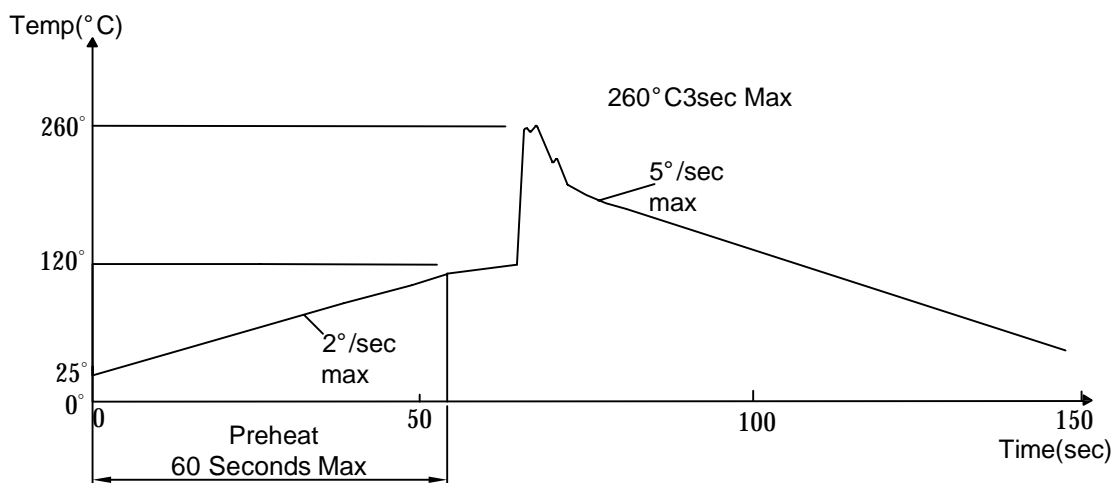

Note: 1.Wave solder should not be made more than one time.
2.You can just only select one of the soldering conditions as above.

Reliability Test:

| Test Item | Test Condition | Description | Reference Standard |
|-------------------------------------|--|---|--|
| Operating Life Test | 1.Under Room Temperature 2.If=20mA 3.t=1000 hrs (-24hrs, +72hrs) | This test is conducted for the purpose of determining the resistance of a part in electrical and thermal stressed. | MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1 |
| High Temperature Storage Test | 1.Ta=105 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under condition of high temperature for hours. | MIL-STD-883:1008 JIS C 7021: B-10 |
| Low Temperature Storage Test | 1.Ta=-40 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under condition of low temperature for hours. | JIS C 7021: B-12 |
| High Temperature High Humidity Test | 1.Ta=65 °C±5°C 2.RH=90%~95% 3.t=240hrs ±2hrs | The purpose of this test is the resistance of the device under tropical for hours. | MIL-STD-202:103B JIS C 7021: B-11 |
| Thermal Shock Test | 1.Ta=105 °C±5°C & -40 °C±5°C (10min) (10min) 2.total 10 cycles | The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature. | MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011 |
| Solder Resistance Test | 1.T.Sol=260 °C±5°C 2.Dwell time= 10 ±1sec. | This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire. | MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1 |
| Solderability Test | 1.T.Sol=230 °C±5°C 2.Dwell time=5 ±1sec | This test intended to see soldering well performed or not. | MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2 |